

LINEAR^{SERIES}



DATE

PROJECT

COMMENTS

CERTIFICATIONS



3WID WALL INDIRECT / DIRECT

AN EXTENSION OF OUR 3-INCH LINEAR FAMILY SERIES

FEATURES

HOUSING

- 1. ARCHITECTURAL DETAILS**
Concealed connection point between the wall and fixture eliminates the visibility of hardware.
- 2. SURE-FIT ALIGNMENT**
4-Point alignment system adjoining each luminaire section to ensure straighter rows while minimizing the appearance of seams.

OPTICAL SYSTEM

- 3. EVENLY ILLUMINATED DIRECT LENS**
High efficiency diffuser designed to minimize glare and provide uniform light distribution. Optional Wall Wash (WW) achieves a superior wall uniformity while minimizing glare.

- 4. OPTIMAL INDIRECT ASYMMETRIC ILLUMINATION**
Diffused forward throw optics with high efficiency diffuser properly illuminates the wall, provides even illumination across the ceiling.
- 5. VERSATILE LIGHT ENGINE**
Multiple lumen intensities provide the correct level of illumination within each space.


ELECTRICAL

OPTIONAL INTEGRAL EMERGENCY BATTERY PACK
Engineered to exceed UL minimum safety standards and is CEC Listed.


0-10 VOLT DIMMING STANDARD
120/277VAC 0-10V dimming to 1% standard.

UP TO 159.7 LUMENS PER WATT AT 90 CRI


LIGHT DISTRIBUTION: LAMBERTIAN




LIGHT DISTRIBUTION: WW



CROSS-SECTION: LAMBERTIAN



CROSS-SECTION: WW



SAMPLE PART NUMBER: 3WID-24-MU-MD-30-UNV-WH-C90

ORDERING

SERIES	LENGTH	UPPER OUTPUT				DIRECT OUTPUT				CCT	VOLTAGE		FINISH		
3WID															
	XXX FT	VHU	1250 LM/FT	LU	500 LM/FT	VHD	1250 LM/FT	LD	500 LM/FT	30	3000K	UNV	120-277V	WH	White
ORDERING NOTES	1' Increments EX: 20' = 20	HU	1000 LM/FT	VLU ³	250 LM/FT	HD	1000 LM/FT	VLD	250 LM/FT	35	3500K	347 ¹	347V	BLK	Black
	1 EM not available with 347V.	MU	750 LM/FT	CU	Custom	MD	750 LM/FT	CD	Custom	40	4000K				

ORDERING NOTES

- 1 EM not available with 347V.
2 EM and sensors are not available with 2' and 3' fixtures.
3 VLU is not available on 2' lengths.

OPTIONS

CRI	INTEGRATED CONTROLS ^{2,3}	OPTICAL	CIRCUITING
C90			
C90	90 CRI	DOS Daylight Occupancy Sensor DALI DRIVER STANDARD	BLANK = LAMBERTIAN SS-U/D Separate Switching UPWARDS/DOWNWARDS

WW⁶ Wall Wash, Direct

FOR INDIVIDUALS	
EM ²	Emergency Battery CEC LISTED
EC	Emergency Circuit

FOR LINEAR RUNS ^{7,8}		
EM		
EMERGENCY BATTERY PACK	QUANTITY PER RUN ⁷	POSITION IN RUN ⁸
EC		
EMERGENCY CIRCUIT	QUANTITY PER RUN ⁷	POSITION IN RUN ⁸

OPTIONS NOTES

- 4 For individual fixtures, sensor located at power feed end. For runs, a sensor is installed into each fixture in run, ex. 2 sensors are installed in a 16' run (1 sensor in each 8' fixture).
5 Consult factory for component or system not listed.
6 Integrated controls not available with wall wash.
7 EM and EC quantity is not to exceed number of discrete fixture sections in a row.
8 EM and EC position refers to which fixture in the run that will be powered by the EM/EC circuit. Position Options: S=Starter, J=Joiner, E=Ender 3WID-24-HU-HD-35-UNV-WH-EM2SJ



3WID WALL

INDIRECT / DIRECT



PHOTOMETRICS & ENERGY CHARTS

3WID-04-HU-HD-35-UNV-XX-C90-AU

Total Lumens: 7,883
Ratio: 50% Up & 50% Down
Wattage: 56.1
Efficacy: 140.0 LM/W
Fixture Length: Four Feet

Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	1140.0	14.4
0 - 40	1828.8	23.2
0 - 60	3145.9	39.9
0 - 90	3997.3	50.7
90 - 180	3885.9	49.3
0 - 180	7883.1	100.0

Indirect (Asymmetric) / Direct (Lambertian) Light at 90 CRI, 3500K

	VHU-VHD	VHU-HD	VHU-MD	VHU-LD	VHU-VLD		LU-VHD	LU-HD	LU-MD	LU-LD	LU-VLD
Watts/ft	18.2	15.8	13.7	11.7	9.7	Watts/ft	13.5	11.1	9.0	7.0	5.0
Lumens/ft	2496	2239	1995	1739	1508	Lumens/ft	1747	1491	1247	991	760
LPW	137.1	141.7	145.6	148.7	155.5	LPW	129.4	134.3	138.5	141.5	151.9

	HU-VHD	HU-HD	HU-MD	HU-LD	HU-VLD		VLU-VHD	VLU-HD	VLU-MD	VLU-LD	VLU-VLD
Watts/ft	16.4	14.0	11.9	9.9	7.9	Watts/ft	12.1	9.7	7.6	5.6	3.6
Lumens/ft	2226	1970	1726	1470	1239	Lumens/ft	1507	1251	1007	751	520
LPW	135.5	140.4	144.7	148.0	156.2	LPW	125.1	129.6	133.4	135.3	146.5

	MU-VHD	MU-HD	MU-MD	MU-LD	MU-VLD		Ex: HU-MD, 3000K, 90CRI
Watts/ft	14.9	12.5	10.4	8.4	6.4	LUMEN MULTIPLIERS	
Lumens/ft	1969	1713	1469	1213	982	3000K	0.995
LPW	132.4	137.3	141.5	144.8	153.9	4000K	1.023

Lumen Adjustment Calculations

Light Output: 6904 x 0.995 = 6869 lm
Light Output/ft: 1726 x 0.995 = 1717 lm/ft
Efficacy = 1717 / 11.9 = 144.2 lm/W

SPECIFICATIONS

MECHANICAL

Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing and LED tray with die-formed steel internal components for strength, alignment and mounting attachment. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire.

Alignment/Assembly:

The alignment system employs a four-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment pins ensure the outer extruded aluminum rails are aligned, while a draw-screw secures housing-to-housing attachment. Additional alignment biscuits double as the light shields.

Lengths:

The 3WID is available in a minimum 2-foot (nominal) length with additional 1-foot increments available (± 0.030). Longer fixture rows are available and will be configured with 4-foot, 5-foot, 6-foot, 7-foot, and 8-foot fixtures. Maximum run length on one power feed is 72'. Continuous runs over 72' will require a second feed.

Mounting Method/Hardware:

Standard mounting hardware includes a galvanized wall cleat with side to side adjusting for final alignment. Feed Point is on the left-hand mounting point for all products longer than 2'; All 2' products have a center feed point.

Exterior Finish:

The 3WID is available in White and Black polyester powder coat finish to ensure durability.

Integrated Controls:

The 3WID is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section. Philips EasySense is standard daylight/occupancy sensor. DALI driver required. If your project requires a component or system not listed, please contact Lumato to review requirements.

MANUFACTURER	ORDERING CODE	SENSOR	CONNECTION	DRIVER
Philips EasySense	DOS	Daylight/PIR Occupancy	Wireless	DALI (Advanced Xitanium SR, 1% Dimming)

OPERATION

Light Engine:

The 3WID is available in 3000K, 3500K and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 90+.

Optics:

The back-lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated surface with minimal glare.

Optional Direct Wall Wash:

Asymmetric extruded aluminum reflector with recessed extruded acrylic lens to achieve a superior wall uniformity while minimizing glare.

Indirect Optics:

Diffused forward throw optics with high efficiency diffuser properly illuminates the wall, provides even illumination across the ceiling and protects LED's from dust and debris.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

Dimming:

The 3WID comes standard with 0-10V dimming to 1%. For DOS (Daylight/ Occ3pency Sensor) ordering code, DALI driver required. Advance Xitanium SR, 1% dimming to be utilized.

Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. Standard battery is CEC Listed. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, 10' HD and VHD, and 12' MD, HD, and VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Ten (10) year limited warranty from date of shipment, covers LED's, driver and luminaire. Optional accessories are covered by their individual Manufacturers' warranties.

Lumen Maintenance:

Rated for 85% initial lumen output at 90,000 Hours of operation, operated at 25°C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

Certifications:

All luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

Manufactured in the USA:

All Lumato Luminaires and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.

Shipping:

4 week lead-time for orders up to 1000 linear feet. Lead-time for orders greater than 1000 linear feet will be determined at time of order.



Manufactured
in the USA



BAA
Compliant



BABA
Compliant



10-Year
Warranty




Standard
90+ CRI




Sure-Fit
Alignment

Fixture Row Layout: Single Unit 2' - 3' - 4' - 5' - 6' - 7' - 8' - 9' - 10' - 11' - 12'

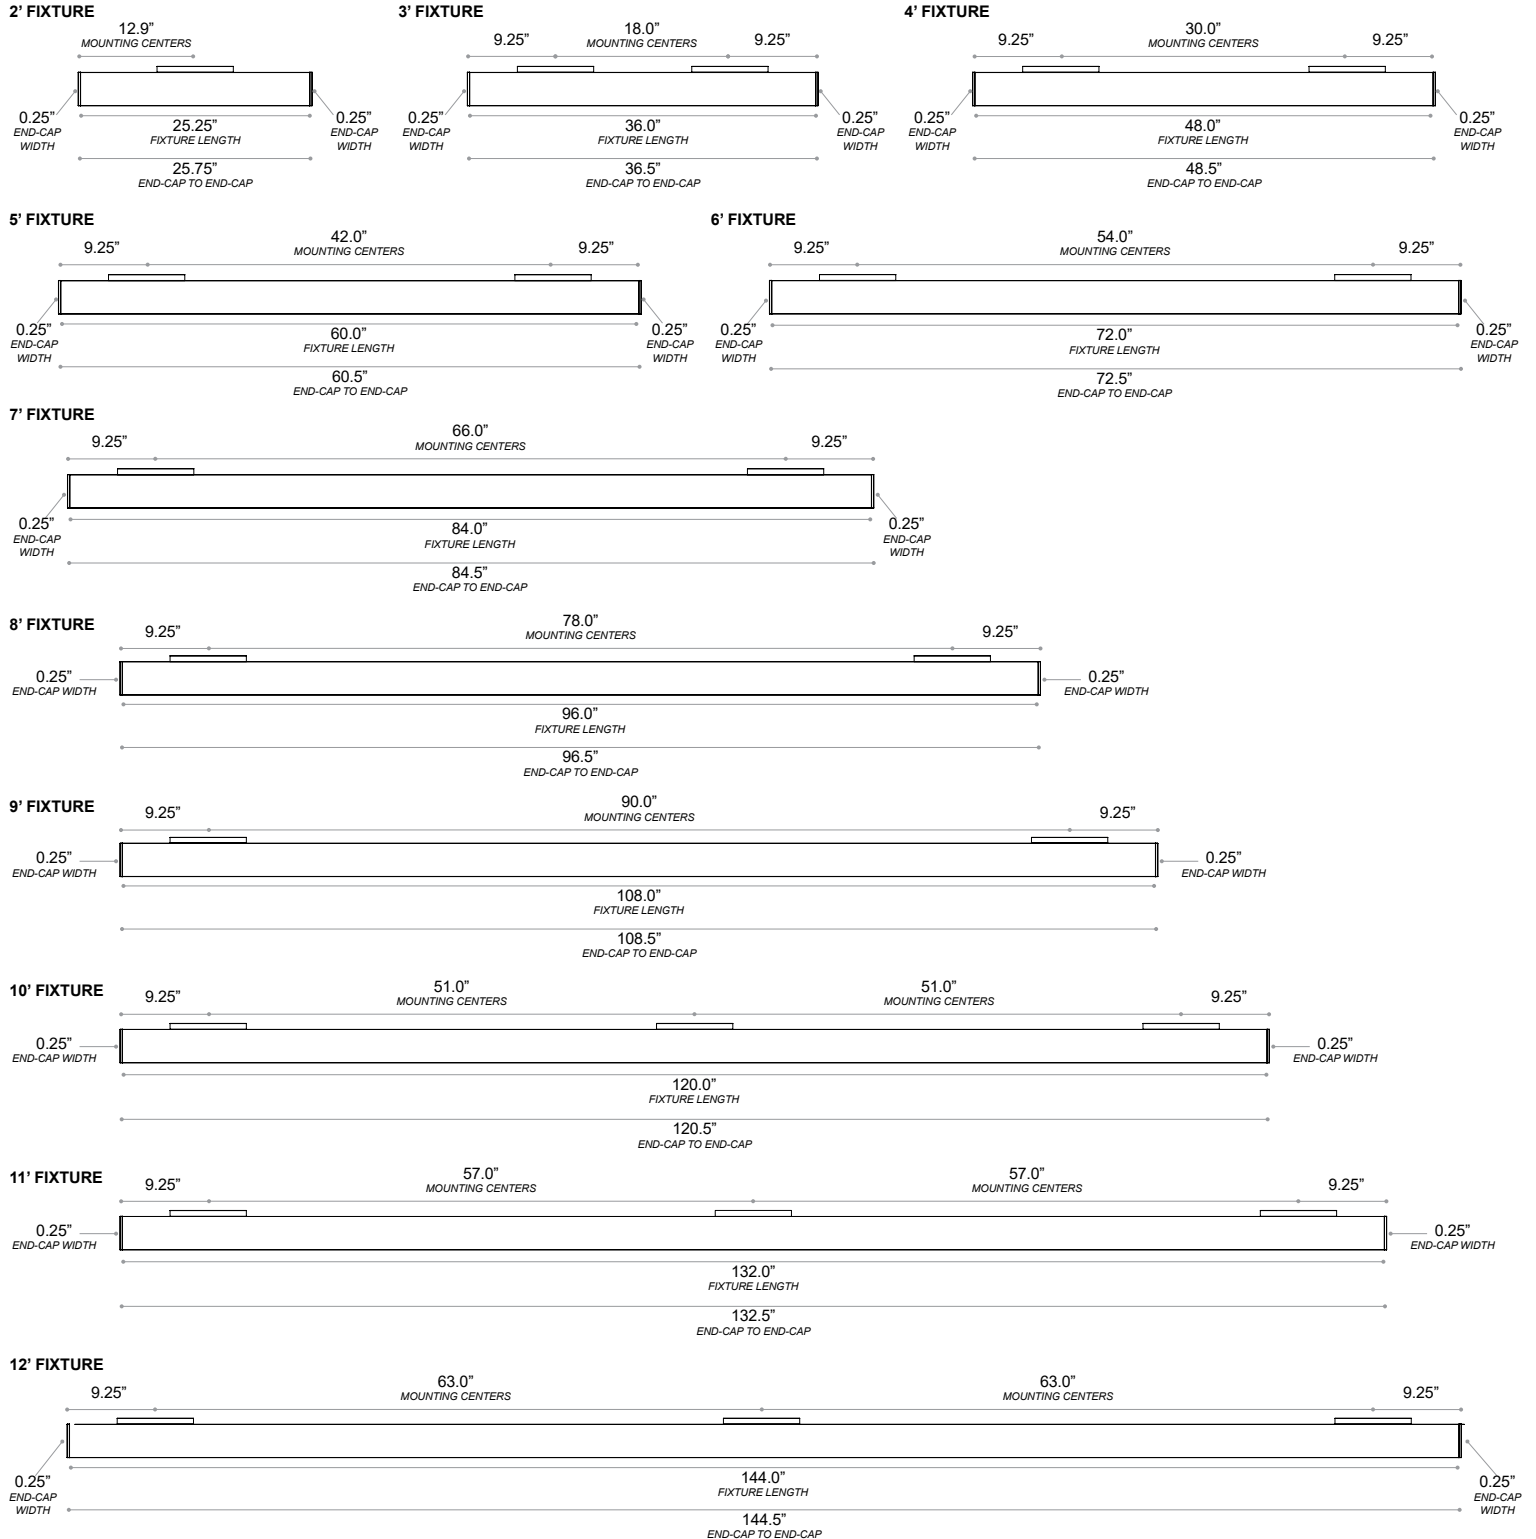




Fixture Row Layout: Two Units 14' - 16'

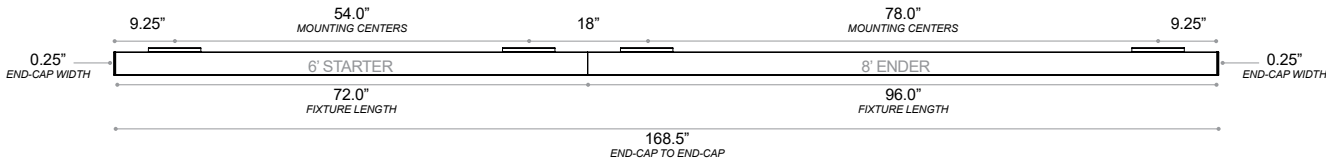


16' FIXTURE

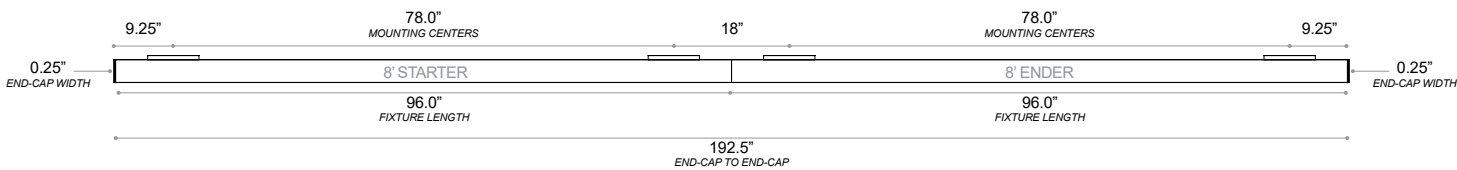


Fixture Row Layout: Three Units 18' - 20' - 22' - 24'


18' FIXTURE

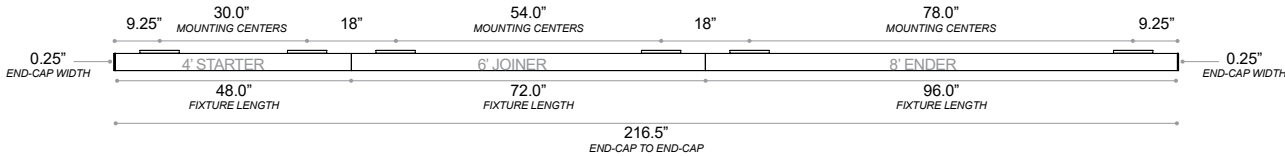


20' FIXTURE

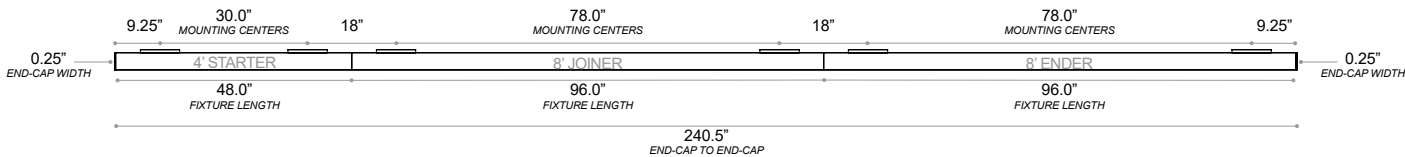

22' FIXTURE

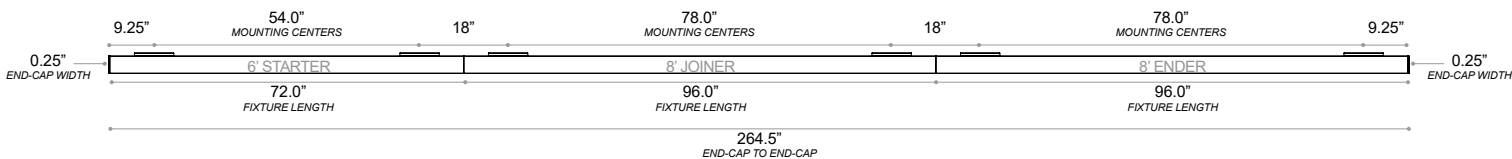

24' FIXTURE

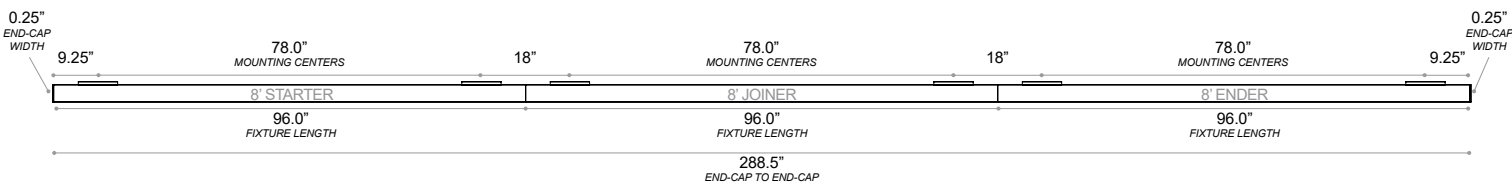



Fixture Row Components

RUN LENGTH	FIXTURE LENGTHS									JOINER KITS
	STARTER	JOINER							ENDER	
	1	2	3	4	5	6	7	8	9	
13'	5'	-	-	-	-	-	-	-	8'	1
14'	6'	-	-	-	-	-	-	-	8'	1
15'	7'	-	-	-	-	-	-	-	8'	1
16'	8'	-	-	-	-	-	-	-	8'	1
17'	3'	6'	-	-	-	-	-	-	8'	2
18'	4'	6'	-	-	-	-	-	-	8'	2
19'	5'	6'	-	-	-	-	-	-	8'	2
20'	4'	8'	-	-	-	-	-	-	8'	2
21'	5'	8'	-	-	-	-	-	-	8'	2
22'	6'	8'	-	-	-	-	-	-	8'	2
23'	7'	8'	-	-	-	-	-	-	8'	2
24'	8'	8'	-	-	-	-	-	-	8'	2
25'	5'	6'	6'	-	-	-	-	-	8'	3
26'	4'	6'	8'	-	-	-	-	-	8'	3
27'	5'	6'	8'	-	-	-	-	-	8'	3
28'	4'	8'	8'	-	-	-	-	-	8'	3
29'	5'	8'	8'	-	-	-	-	-	8'	3
30'	6'	8'	8'	-	-	-	-	-	8'	3
31'	7'	8'	8'	-	-	-	-	-	8'	3
32'	8'	8'	8'	-	-	-	-	-	8'	3
33'	5'	6'	6'	8'	-	-	-	-	8'	4
34'	4'	6'	8'	8'	-	-	-	-	8'	4
35'	5'	6'	8'	8'	-	-	-	-	8'	4
36'	4'	8'	8'	8'	-	-	-	-	8'	4
37'	5'	8'	8'	8'	-	-	-	-	8'	4
38'	6'	8'	8'	8'	-	-	-	-	8'	4
39'	7'	8'	8'	8'	-	-	-	-	8'	4
40'	8'	8'	8'	8'	-	-	-	-	8'	4
41'	5'	6'	6'	8'	8'	-	-	-	8'	5
42'	4'	6'	8'	8'	8'	-	-	-	8'	5
43'	5'	6'	8'	8'	8'	-	-	-	8'	5
44'	4'	8'	8'	8'	8'	-	-	-	8'	5
45'	5'	8'	8'	8'	8'	-	-	-	8'	5
46'	6'	8'	8'	8'	8'	-	-	-	8'	5
47'	7'	8'	8'	8'	8'	-	-	-	8'	5
48'	8'	8'	8'	8'	8'	-	-	-	8'	5
49'	5'	6'	6'	8'	8'	8'	-	-	8'	6
50'	4'	6'	8'	8'	8'	8'	-	-	8'	6
51'	5'	6'	8'	8'	8'	8'	-	-	8'	6
52'	4'	8'	8'	8'	8'	8'	-	-	8'	6
53'	5'	8'	8'	8'	8'	8'	-	-	8'	6
54'	6'	8'	8'	8'	8'	8'	-	-	8'	6
55'	7'	8'	8'	8'	8'	8'	-	-	8'	6
56'	8'	8'	8'	8'	8'	8'	-	-	8'	6
57'	5'	6'	6'	8'	8'	8'	8'	-	8'	7
58'	4'	6'	8'	8'	8'	8'	8'	-	8'	7
59'	5'	6'	8'	8'	8'	8'	8'	-	8'	7
60'	4'	8'	8'	8'	8'	8'	8'	-	8'	7

	FIXTURE LENGTH	CENTER-TO-CENTER BRACKET SPACING
3'	36.0"	18.0"
4'	48.0"	30.0"
5'	60.0"	42.0"
6'	72.0"	54.0"
7'	84.0"	66.0"
8'	96.0"	78.0"

Note 1: 2' fixtures use a single mounting bracket centered on the fixture
Note 2: 10', 11', and 12' fixtures have a third mounting bracket centered on the fixture

