

# LINEAR<sup>SERIES</sup>



DATE

PROJECT

COMMENTS

CERTIFICATIONS



## 2S SUSPENDED DIRECT

AN EXTENSION OF OUR 2-INCH LINEAR FAMILY SERIES

FEATURES

### HOUSING

#### 1. ARCHITECTURAL DETAILS

Provide a clean architectural appearance with the hidden connect mounting system and seamlessly adjoin luminaires with the sure-fit alignment process.

#### 2. SURE-FIT ALIGNMENT

4-Point alignment system adjoining each luminaire section to ensure straighter rows while minimizing the appearance of seams.

optimal aesthetic value without sacrificing high efficiency light output.

#### 4. VERSATILE LIGHT ENGINE

Multiple lumen intensities provide the correct level of illumination within each space.

### ELECTRICAL

#### OPTIONAL INTEGRAL EMERGENCY BATTERY PACK


Engineered to exceed UL minimum safety standards and is CEC Listed.

#### 0-10 VOLT DIMMING STANDARD


120/277VAC 0-10V dimming to 1% standard.

UP TO 112.5 LUMENS PER WATT AT 90 CRI

### LIGHT DISTRIBUTION



### CROSS-SECTION



### OPTICAL SYSTEM

#### 3. EVENLY ILLUMINATED ARCHITECTURAL LENS

Architectural grade diffuser designed to minimize glare, provide uniform light distribution, and

SAMPLE PART NUMBER: 2S-24-MD-30-UNV-T1-WH-C90

ORDERING

SERIES	LENGTH	OUTPUT		CCT	VOLTAGE	MOUNTING		FINISH
2S								
	XXX FT	VHD 1250 LM/FT	LD 500 LM/FT	30 3000K	UNV 120-277V	T1 1" T-Grid	HC Hard Ceiling	WH White
	1' Increments EX: 20' = 20	HD 1000 LM/FT	VLD 250 LM/FT	35 3500K	347' 347V	T9 9/16" T-Grid	JB Junction Box	BLK Black
		MD 750 LM/FT	CD Custom	40 4000K		SC Screw Slot Grid		

#### ORDERING NOTES

1 EM not available with 347V.

2 EM and sensors are not available with 2' and 3' fixtures.

OPTIONS

CRI	SUSPENSION	INTEGRATED CONTROLS <sup>2, 3, 4</sup>		FOR INDIVIDUALS		FOR LINEAR RUNS <sup>5, 6</sup>		
C90						EM		
C90 90 CRI	BLANK = 48" CABLE	DOS	Daylight Occupancy Sensor DALI DRIVER STANDARD	EM <sup>2</sup>	Emergency Battery CEC LISTED	EMERGENCY BATTERY PACK	QUANTITY PER RUN <sup>6</sup>	POSITION IN RUN <sup>6</sup>
	CB96 96" Cables			EC	Emergency Circuit	EC		
	CB144 144" Cables					EMERGENCY CIRCUIT	QUANTITY PER RUN <sup>6</sup>	POSITION IN RUN <sup>6</sup>
	BC Black Canopy & Cord							

#### OPTIONS NOTES

3 For individual fixtures, sensor located at power feed end. For runs, a sensor is installed into each fixture in run, ex. 2 sensors are installed in a 16' run (1 sensor in each 8' fixture).

4 Consult factory for component or system not listed.

5 EM and EC quantity is not to exceed number of discrete fixture sections in a row.

6 EM and EC position refers to which fixture in the run that will be powered by the EM/EC circuit. Position options: S=Starter, J=Joiner, E=Ender, Ex: 2S-24-HD-35-UNV-T1-WH-EM2SJ



We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact the Lumato sales team. For additional information and details visit our website at [www.lumato.com](http://www.lumato.com). All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.

Rev 1 July 2025

# 2S SUSPENDED DIRECT



## PHOTOMETRICS & ENERGY CHARTS

### 2S-04-HD-35-UNV-XX-C90

Total Lumens: 4,055


Ratio: 0% Up & 100% Down

Wattage: 37.4

Efficacy: 108.0 LM/W

Fixture Length: Four Feet

0-Deg -----  
45-Deg -----  
90-Deg -----



### Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	1206.8	29.8
0 - 40	1923.4	47.4
0 - 60	3247.4	80.1
0 - 90	4054.6	100.0
90 - 180	0.2	0.0
0 - 180	4054.8	100.0

### Direct (Lambertian) Light at 90 CRI, 3500K

	VHD:1250	HD:1000	MD:750	LD:500	VLD:250
<b>Watts/ft</b>	11.5	9.4	6.9	4.4	2.3
<b>Lumens/ft</b>	1262	1014	779	492	250
<b>LPW</b>	109.7	108.4	112.5	111.8	108.7

### Lumen Adjustment Calculations

LUMEN MULTIPLIERS	
3000K	0.995
3500K	1.000
4000K	1.023

### Example: MD Output, 3000K at 90CRI

Total Light Output: 3116 x 0.995 = 3100 lm  
Total Light Output Per Foot: 779 x 0.995 = 775 lm/ft  
Efficacy = 775 / 6.9 = 112.3 lm/W

## SPECIFICATIONS

## MECHANICAL

### Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing and LED tray with die-formed steel internal components for strength, alignment and mounting attachment. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire.

### Alignment/Assembly:

The alignment system employs a four-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment pins ensure the outer extruded aluminum rails are aligned, while a draw-screw secures housing-to-housing attachment. Additional alignment biscuits double as the light shields.

### Lengths:

The 2S is available in a minimum 2-foot (nominal) length with additional 1-foot increments available ( $\pm 0.030"$ ). Longer fixture rows are available and will be configured with 4-foot, 5-foot, 6-foot, 7-foot, and 8-foot fixtures. Maximum run length on one power feed is 72'. Continuous runs over 72' will require a second feed.

### Mounting Method/Hardware:

The Hidden-Connect design recesses all attachment hardware (hanging cable and power cord) below the top plane of the housing to enable a sleek, clean finished look. Standard hanging hardware includes 1/16" diameter, galvanized steel aircraft cable with adjustable and lockable nickel-plated cable grippers and a white 18/5 S.J.T. power cord. The standard hardware includes a 60" power cord and 54" aircraft cables to accommodate a 48" mounting distance from the ceiling. Longer hanging cables and power cords are available as an option. Ceiling type options are "T1" = T-Grid, "T9" = T-Grid, "SC" = Screw Slot Grid, "HC" = Hard Ceiling or "JB" = J-Box mount. Ceiling canopy provided. All Lumato suspension hardware is tested and listed to UL1598 requirements for loading/fixture support.

### Exterior Finish:

The 2S is available in White and Black polyester powder coat finish to ensure durability.

### Suspension Components:

Fixtures are suspended by 1/16" galvanized aircraft cable. Cables are attached to the ceiling suspension point with a 1/4-20 threaded ceiling cable barrel that incorporates a threaded ring to support the feed/hanger canopy allowing access to the J-box/hanger without removal of the suspension cable allowing conductor inspection/service without having to support the fixture(s). Feed canopies are 5" O.D. and hanger canopies are 2" O.D. (JB = 5" O.D.). Cable lengths can be specified for 48", 96" and 144" suspension lengths.

### Integrated Controls:

The 2S is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section. Philips EasySense is standard daylight/occupancy sensor. DALI driver required. If your project requires a component or system not listed, please contact your Lumato lighting representative.

MANUFACTURER	ORDERING CODE	SENSOR	CONNECTION	DRIVER
Philips EasySense	DOS	Daylight/PIR Occupancy	Wireless	DALI (Advanced Xitanium SR, 1% Dimming)

## OPERATION

### Light Engine:

The 2S is available in 3000K, 3500K and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 90+.

### Optics:

The back-lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated surface with minimal glare.

### Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

### Dimming:

The 2S comes standard with 0-10V dimming to 1%. For DOS (Daylight/Occupancy Sensor) ordering code, DALI driver required. Advance Xitanium SR, 1% dimming to be utilized.

### Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. Standard battery is CEC Listed. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, 10' HD and VHD, and 12' MD, HD, and VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

### Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

## GENERAL

### Warranty:

Ten (10) year limited warranty from date of shipment, covers LED's, driver, luminaire. Opt. accessories are covered by their individual MFRS' warranties.

### Lumen Maintenance:

Rated for 85% initial lumen output at 90,000 Hours of operation, operated at 25°C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

### Certifications:

All Luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

### Manufactured in the USA:

All Lumato Luminaires and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.


### Shipping:

4 week lead-time for orders up to 1000 linear feet.  
Lead-time for orders greater than 1000 linear feet will be determined at time of order.

2S SUSPENDED  
DIRECT



Fixture Row Layout: Single Unit 2' - 3' - 4' - 5' - 6' - 7' - 8' - 9' - 10' - 11' - 12'

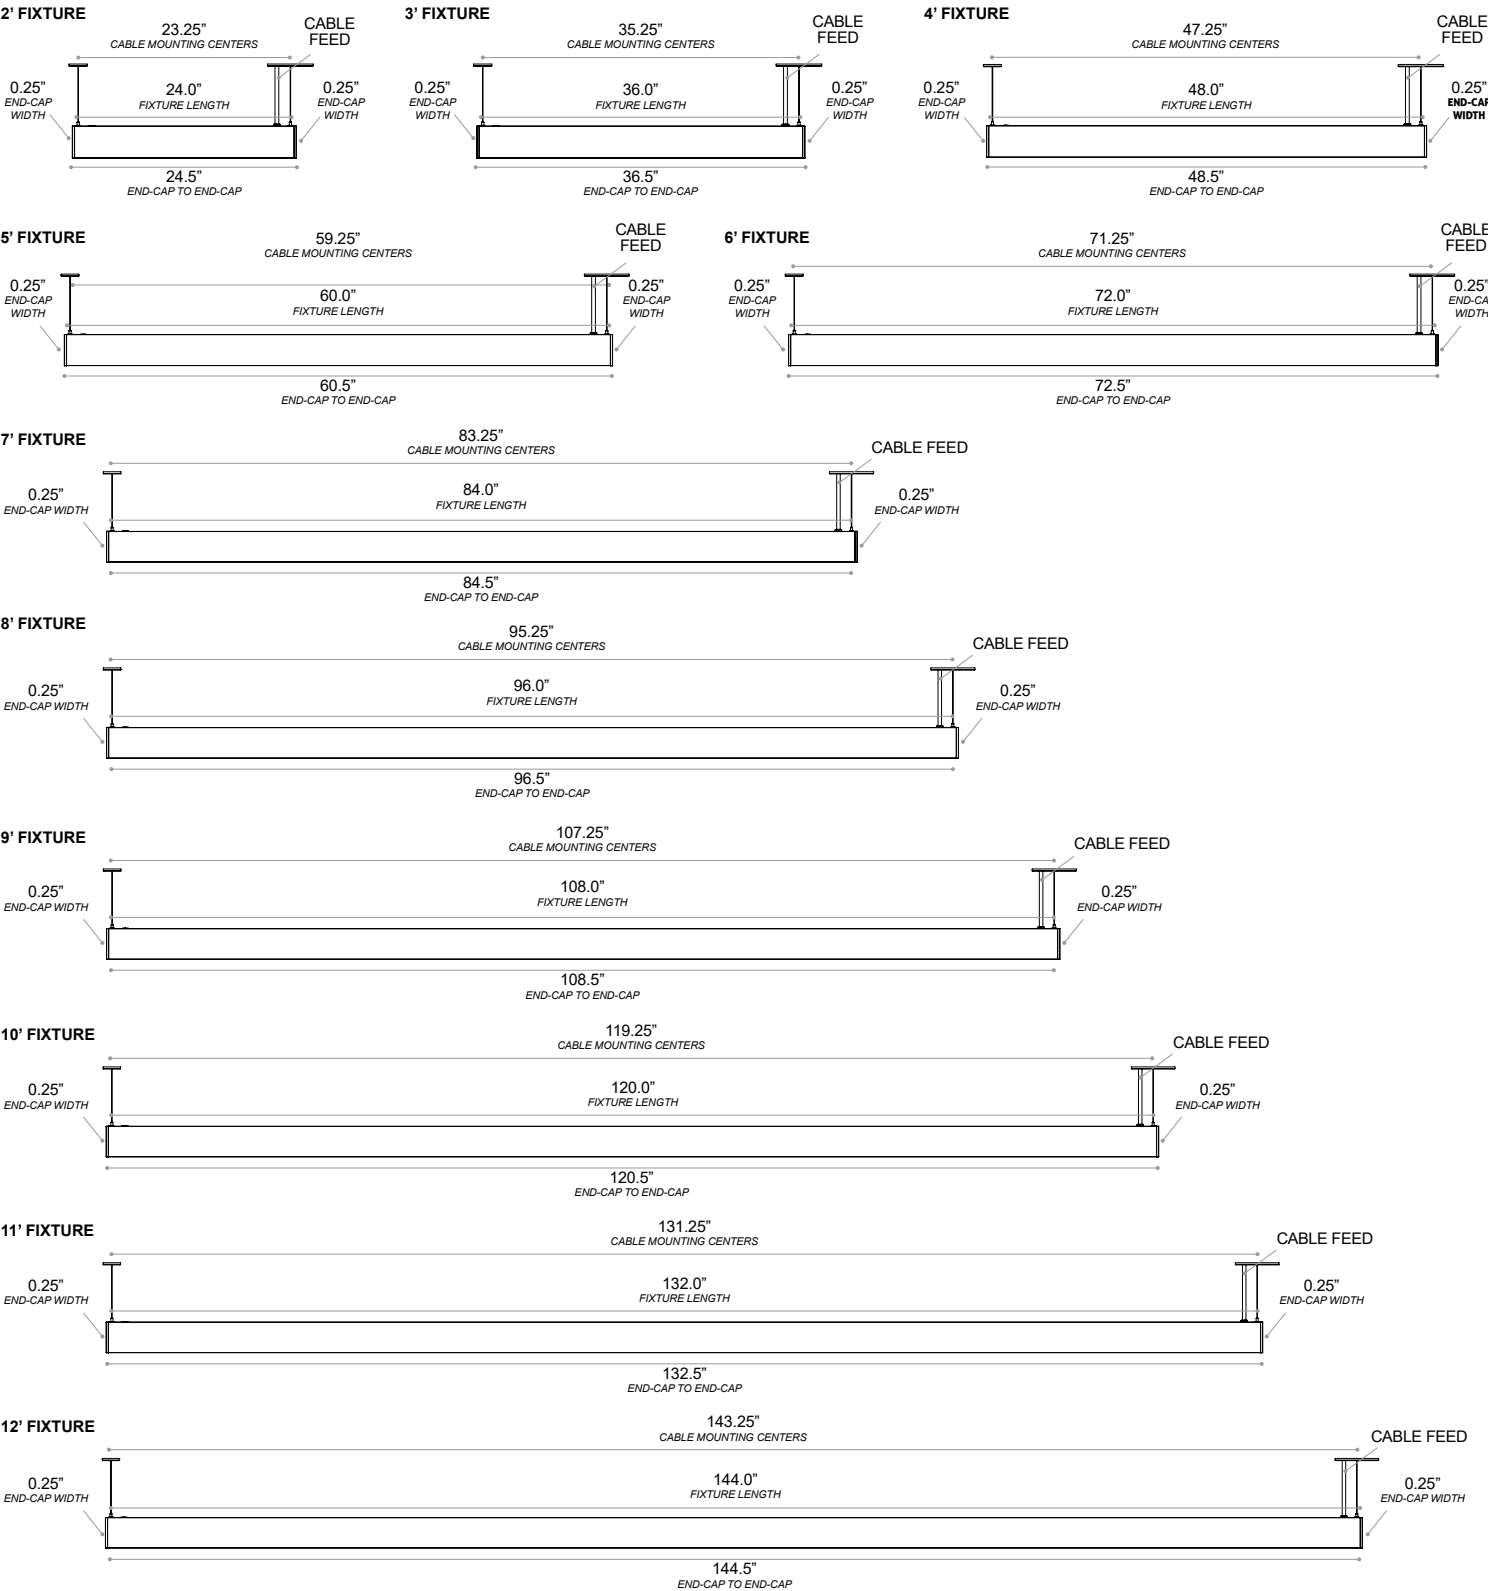


2S SUSPENDED  
DIRECT




Fixture Row Layout: Two Units 14' - 16'

14' FIXTURE

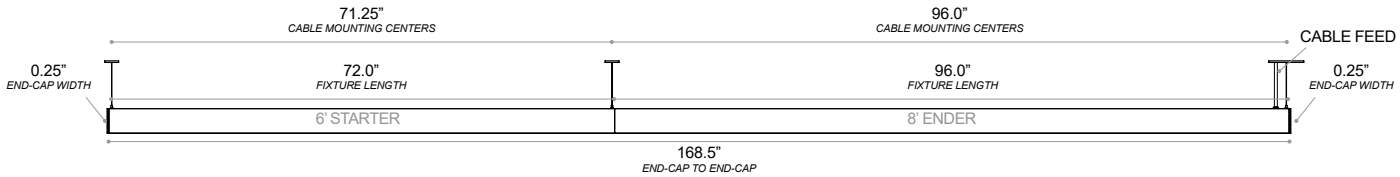


16' FIXTURE

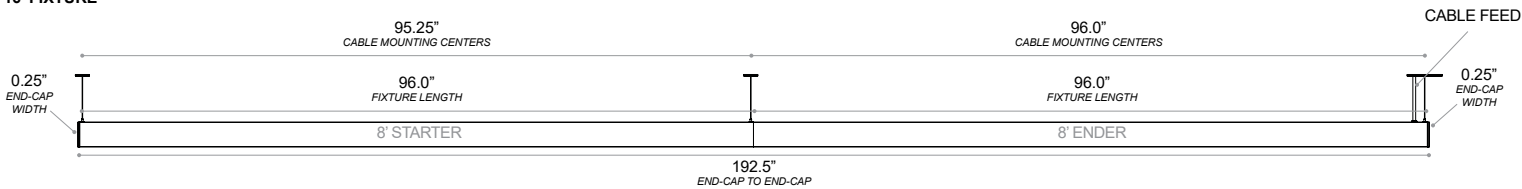


Fixture Row Layout: Three Units 18' - 20' - 22' - 24'


18' FIXTURE

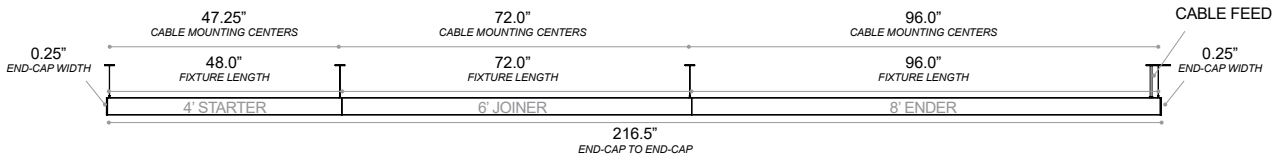


20' FIXTURE

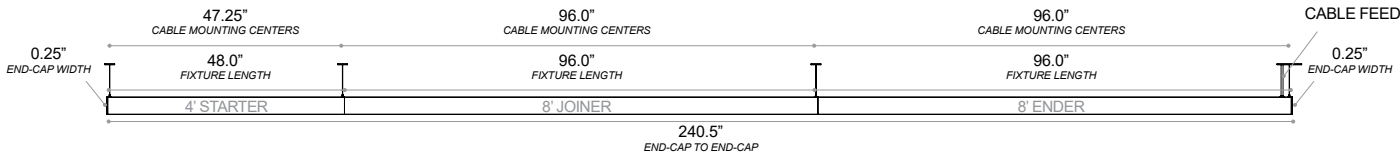

22' FIXTURE

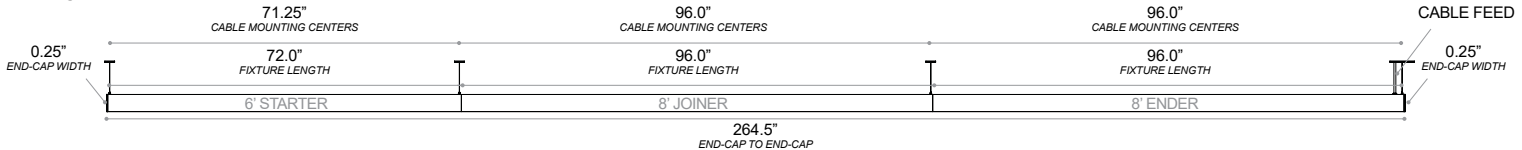

24' FIXTURE

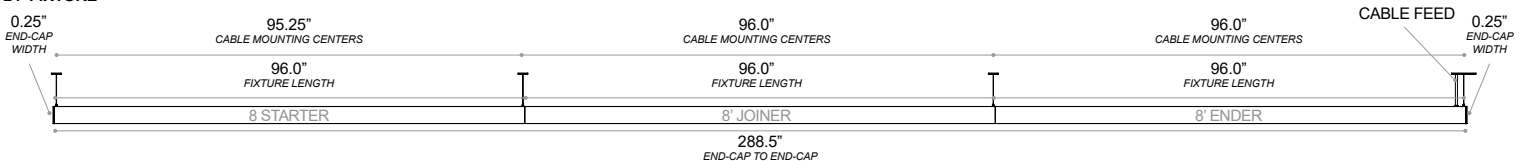

2S SUSPENDED  
DIRECT



Fixture Row Components

RUN LENGTH	FIXTURE LENGTHS									JOINER	FEED KITS	HANGER KITS	END-CAP TO END-CAP
	STARTER	JOINER							ENDER				
	1	2	3	4	5	6	7	8	9				
13'	5'	-	-	-	-	-	-	-	8'	1	1	2	156.5"
14'	6'	-	-	-	-	-	-	-	8'	1	1	2	168.5"
15'	7'	-	-	-	-	-	-	-	8'	1	1	2	180.5"
16'	8'	-	-	-	-	-	-	-	8'	1	1	2	192.5"
17'	3'	6'	-	-	-	-	-	-	8'	2	1	3	204.5"
18'	4'	6'	-	-	-	-	-	-	8'	2	1	3	216.5"
19'	5'	6'	-	-	-	-	-	-	8'	2	1	3	228.5"
20'	4'	8'	-	-	-	-	-	-	8'	2	1	3	240.5"
21'	5'	8'	-	-	-	-	-	-	8'	2	1	3	252.5"
22'	6'	8'	-	-	-	-	-	-	8'	2	1	3	264.5"
23'	7'	8'	-	-	-	-	-	-	8'	2	1	3	276.5"
24'	8'	8'	-	-	-	-	-	-	8'	2	1	3	288.5"
25'	5'	6'	6'	-	-	-	-	-	8'	3	1	4	300.5"
26'	4'	6'	8'	-	-	-	-	-	8'	3	1	4	312.5"
27'	5'	6'	8'	-	-	-	-	-	8'	3	1	4	324.5"
28'	4'	8'	8'	-	-	-	-	-	8'	3	1	4	336.5"
29'	5'	8'	8'	-	-	-	-	-	8'	3	1	4	348.5"
30'	6'	8'	8'	-	-	-	-	-	8'	3	1	4	360.5"
31'	7'	8'	8'	-	-	-	-	-	8'	3	1	4	372.5"
32'	8'	8'	8'	-	-	-	-	-	8'	3	1	4	384.5"
33'	5'	6'	6'	8'	-	-	-	-	8'	4	1	5	396.5"
34'	4'	6'	8'	8'	-	-	-	-	8'	4	1	5	408.5"
35'	5'	6'	8'	8'	-	-	-	-	8'	4	1	5	420.5"
36'	4'	8'	8'	8'	-	-	-	-	8'	4	1	5	432.5"
37'	5'	8'	8'	8'	-	-	-	-	8'	4	1	5	444.5"
38'	6'	8'	8'	8'	-	-	-	-	8'	4	1	5	456.5"
39'	7'	8'	8'	8'	-	-	-	-	8'	4	1	5	468.5"
40'	8'	8'	8'	8'	-	-	-	-	8'	4	1	5	480.5"
41'	5'	6'	6'	8'	8'	-	-	-	8'	5	1	6	492.5"
42'	4'	6'	8'	8'	8'	-	-	-	8'	5	1	6	504.5"
43'	5'	6'	8'	8'	8'	-	-	-	8'	5	1	6	516.5"
44'	4'	8'	8'	8'	8'	-	-	-	8'	5	1	6	528.5"
45'	5'	8'	8'	8'	8'	-	-	-	8'	5	1	6	540.5"
46'	6'	8'	8'	8'	8'	-	-	-	8'	5	1	6	552.5"
47'	7'	8'	8'	8'	8'	-	-	-	8'	5	1	6	564.5"
48'	8'	8'	8'	8'	8'	-	-	-	8'	5	1	6	576.5"
49'	5'	6'	6'	8'	8'	8'	-	-	8'	6	1	7	588.5"
50'	4'	6'	8'	8'	8'	8'	-	-	8'	6	1	7	600.5"
51'	5'	6'	8'	8'	8'	8'	-	-	8'	6	1	7	612.5"
52'	4'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	624.5"
53'	5'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	636.5"
54'	6'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	648.5"
55'	7'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	660.5"
56'	8'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	672.5"
57'	5'	6'	6'	8'	8'	8'	8'	-	8'	7	1	8	684.5"
58'	4'	6'	8'	8'	8'	8'	8'	-	8'	7	1	8	696.5"
59'	5'	6'	8'	8'	8'	8'	8'	-	8'	7	1	8	708.5"
60'	4'	8'	8'	8'	8'	8'	8'	-	8'	7	1	8	720.5"

	FIXTURE LENGTH	MOUNTING CENTERS	
	STARTER	STARTER	JOINER/ENDER
3'	36.0"	35.25"	-
4'	48.0"	47.25"	-
5'	60.0"	59.25"	-
6'	72.0"	71.25"	72.0"
7'	84.0"	83.25"	-
8'	96.0"	95.25"	96.0"

