

LINEAR^{SERIES}



DATE

PROJECT

COMMENTS

CERTIFICATIONS



B25 WALL DIRECT

FEATURES

OPTICAL SYSTEM

1. VERSATILE LIGHT ENGINE

Multiple lumen intensities provide the correct level of illumination within each space.

2. SEAMLESS, HIGH EFFICIENCY LIGHT DIFFUSER

Seamless, roll-in lens eliminates light leaks, minimizes glare, and provides uniform light distribution.

ADA COMPLIANT HOUSING

3. SURE-FIT ALIGNMENT

Full-body alignment system adjoins each luminaire section to ensure straighter rows while minimizing the appearance of seams.

ELECTRICAL

4. EFFICACY

Luminaire efficacy up to 111 lumens per watt helps achieve Best in Class power density performance.


DIMMING

5. 0-10 VOLT DIMMING TO 1% STANDARD

LIGHT DISTRIBUTION



CROSS-SECTION



SAMPLE PART NUMBER: B25-W-24-MD-30-UNV-WH

ORDERING

| SERIES | LENGTH ¹ | OUTPUT | | CCT | | VOLTAGE | | FINISH | | ORDERING NOTES | | |
|--------|----------------------------------|--------|------------|-----|-----------|---------|-------|------------------|----------|----------------|------------------|--------|
| B25-W | | | | | | | | | | | | |
| | XX FT | VHD | 1250 LM/FT | LD | 500 LM/FT | 30 | 3000K | UNV | 120-277V | | WH | White |
| | 2' Increments EX: 20' FT = 20 | HD | 1000 LM/FT | VLD | 250 LM/FT | 35 | 3500K | 347 ² | 347V | | BLK | Black |
| | | MD | 750 LM/FT | CD | Custom | 40 | 4000K | | | | S | Silver |
| | | | | | | | | | | GR | CHARCOAL Gray | |

1 Nominal length.

2 EM not available with 347V.

3 EM and sensors are not available with 2' and 3' fixtures

4 For individual fixtures, sensor located at power feed end. For runs, a sensor is installed into each fixture in run, ex. 2 sensors are installed in a 16' run (1 sensor in each 8' fixture).

OPTIONS

| CRI | INTEGRATED CONTROLS ^{3,4,5} | | FOR INDIVIDUALS | | FOR LINEAR RUNS ^{6,7} | | | OPTIONS NOTES |
|----------------|--------------------------------------|---|-------------------|---------------------------------|--------------------------------|-------------------------------|------------------------------|----------------------|
| | | | | | EM | | | |
| BLANK = 80 CRI | DOS | Daylight Occupancy Sensor DALI DRIVER STANDARD | EM ^{2,3} | Emergency Battery CEC LISTED | EMERGENCY BATTERY PACK | QUANTITY PER RUN ⁶ | POSITION IN RUN ⁷ | |
| C90 | 90 CRI | | EC | Emergency Circuit | EC | | | |
| | | | | | EMERGENCY CIRCUIT | QUANTITY PER RUN ⁶ | POSITION IN RUN ⁷ | |
| | | | | | | | | STARTER JOINER ENDER |

B25 WALL DIRECT



PHOTOMETRICS & ENERGY CHARTS

B25-W-04-HD-35

Total Lumens: 3957

Ratio: 0% Up and 100% Down


Wattage: 37.2

Efficacy: 106 LM/W

Fixture Length: Four Feet

Zonal Lumen Summary

| Zone | Lumens | % Fixt |
|----------|--------|--------|
| 0 - 30 | 1084.3 | 27.4 |
| 0 - 40 | 1765.9 | 44.6 |
| 0 - 60 | 3099.0 | 78.3 |
| 0 - 90 | 3956.3 | 100.0 |
| 90 - 180 | 0.3 | 0.0 |
| 0 - 180 | 3956.6 | 100.0 |

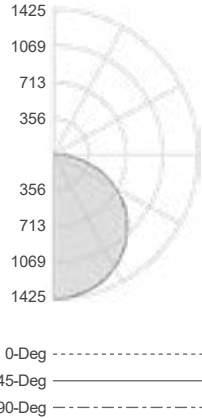

Direct (Lambertian) Light, 3500K

| | VHD:1250 | HD:1000 | MD:750 | LD:500 | VLD:250 |
|-----------|----------|---------|--------|--------|---------|
| Watts/ft | 11.9 | 9.3 | 6.9 | 4.6 | 2.4 |
| Lumens/ft | 1237 | 989.25 | 742 | 498 | 261 |
| LPW | 103.9 | 106.4 | 107.5 | 108.3 | 111.1 |

Lumen Adjustment Calculations

| LUMEN MULTIPLIERS | |
|-------------------|-------|
| 3000K | 0.989 |
| 4000K | 1.042 |

Example: MD, 3000K at 90CRI

Light Output: $2968 \times 0.989 = 2935$ lm

Light Output/ft: $742 \times 0.989 = 734$ lm/ft

Efficacy = $734 / 6.9 = 106.3$ lm/w

SPECIFICATIONS

MECHANICAL

Housing Construction:

Extruded aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment, and mounting attachment.

Alignment/Assembly:

The Sure-Fit alignment system employs a full height joining biscuit, designed to create straighter rows and eliminate light leak at fixture seams. Two nuts are used to draw fixtures together to secure housing-to-housing attachment.

Lengths:

The B25 is available in individual 2-foot (25.25"), 4-foot (48"), 6-foot (72"), 8-foot (96"), 10-foot (120"), and 12-foot (144") lengths (± 0.030 "). Longer fixture rows are available and will be configured per Lumato factory specifications; typical rows are configured with 8-foot fixtures. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire. Each end cap adds 5/16" to the length of each fixture run.

Mounting Method/Hardware:

Wall mounting hardware uses 2 galvanized sheet metal mounting cleats with side-to-side adjustability for final alignment. Position all junction boxes in accordance with submittal drawings and installation instructions.

Fixture Finish:

The B25 fixture finish is available in White, Black, Silver or Charcoal Gray polyester powder coat finish to ensure durability. Luminaires are available in any RAL color as an option.

Integrated Controls:

The B25 is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section. Philips EasySense is standard daylight/occupancy sensor. DALI driver required. If your project requires a component or system not listed, please contact your Lumato lighting representative.

| MANUFACTURER | ORDERING CODE | SENSOR | CONNECTION | DRIVER |
|-------------------|---------------|------------------------|------------|---|
| Philips EasySense | DOS | Daylight/PIR Occupancy | Wireless | DALI (Advanced Xitanium SR, 1% Dimming) |

OPERATION

Light Engine:

The B25 is available in 3000K, 3500K, and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 80+ with a 90+ CRI option available.

Optics:

Our frosted acrylic roll in lens is designed to maximize efficiency while minimizing glare and eliminating light leaks at fixture joints. Individual fixtures come with lens factory installed while continuous runs will have a separate lens kit installed in the field once the run is hung. This will allow for a continuous/seamless lens up to 100'.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input or 347V. Power factor >0.9 THD $<15\%$. Integral Surge Protection to 2KV.

Dimming:

The B25 comes standard with 0-10V dimming to 1%. For DOS (Daylight/Occupancy Sensor) ordering code, DALI driver required. Advance Xitanium SR, 1% dimming to be utilized.

Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. Standard battery is CEC Listed. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Ten (10) year limited warranty from date of shipment, covers LED's, driver and luminaire. Optional accessories are covered by their individual Manufacturers' warranties.

Lumen Maintenance:

Rated for 85% initial lumen output (L85) at 50,000 hours of operation, operated at 25°C ambient temperatures; per TM-21 Guidelines published by the Illuminated Engineering Society (IES).

Certifications:

All Luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

Manufactured in the USA:

All Lumato luminaires and components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.

Shipping:

4 week lead-time for orders up to 1000 linear feet.


Lead-time for orders greater than 1000 linear feet will be determined at time of order.

B25 WALL
DIRECT




FIXTURE ROW LAYOUT: SINGLE UNIT 2' - 4' - 6' - 8' - 10' - 12'


2' FIXTURE

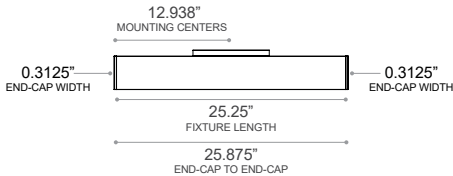


4' FIXTURE

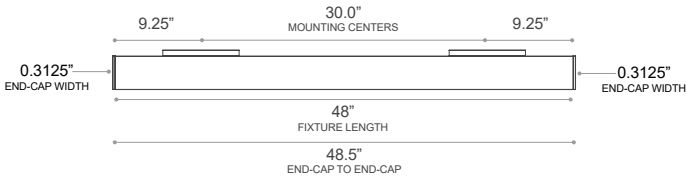


6' FIXTURE

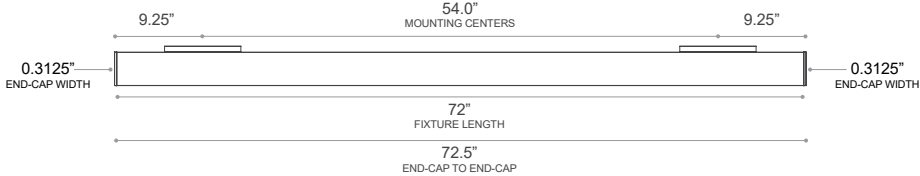


8' FIXTURE

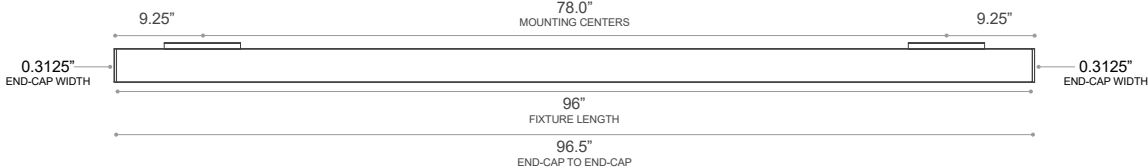

10' FIXTURE

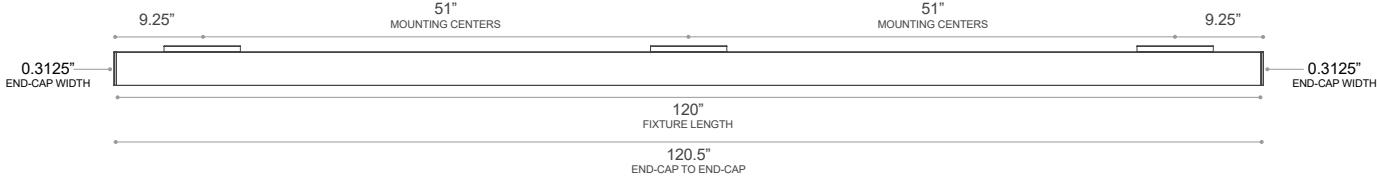

12' FIXTURE

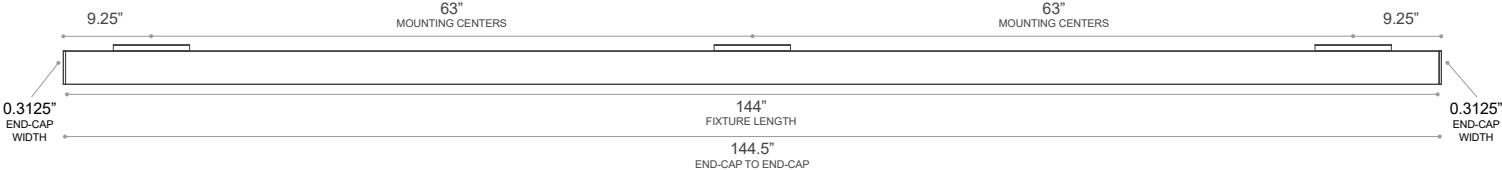


B25 WALL
DIRECT



FIXTURE ROW COMPONENTS

| RUN LENGTH (FT) | FIXTURE LENGTHS | | | | | | | | | JOINER KITS |
|-----------------|-----------------|--------|----|----|----|----|----|----|-------|-------------|
| | STARTER | JOINER | | | | | | | ENDER | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 14 | 6' | - | - | - | - | - | - | - | 8' | 1 |
| 16 | 8' | - | - | - | - | - | - | - | 8' | 1 |
| 18 | 4' | 6' | - | - | - | - | - | - | 8' | 2 |
| 20 | 4' | 8' | - | - | - | - | - | - | 8' | 2 |
| 22 | 6' | 8' | - | - | - | - | - | - | 8' | 2 |
| 24 | 8' | 8' | - | - | - | - | - | - | 8' | 2 |
| 26 | 4' | 6' | 8' | - | - | - | - | - | 8' | 3 |
| 28 | 4' | 8' | 8' | - | - | - | - | - | 8' | 3 |
| 30 | 6' | 8' | 8' | - | - | - | - | - | 8' | 3 |
| 32 | 8' | 8' | 8' | - | - | - | - | - | 8' | 3 |
| 34 | 4' | 6' | 8' | 8' | - | - | - | - | 8' | 4 |
| 36 | 4' | 8' | 8' | 8' | - | - | - | - | 8' | 4 |
| 38 | 6' | 8' | 8' | 8' | - | - | - | - | 8' | 4 |
| 40 | 8' | 8' | 8' | 8' | - | - | - | - | 8' | 4 |
| 42 | 4' | 6' | 8' | 8' | 8' | - | - | - | 8' | 5 |
| 44 | 4' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 |
| 46 | 6' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 |
| 48 | 8' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 |
| 50 | 4' | 6' | 8' | 8' | 8' | 8' | - | - | 8' | 6 |
| 52 | 4' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 |
| 54 | 6' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 |
| 56 | 8' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 |
| 58 | 4' | 6' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 |
| 60 | 4' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 |
| 62 | 6' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 |
| 64 | 8' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 |
| 66 | 4' | 6' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 |
| 68 | 4' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 |
| 70 | 6' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 |
| 72 | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 |

| | FIXTURE LENGTH | CENTER-TO-CENTER BRACKET SPACING |
|----|----------------|-------------------------------------|
| 4' | 48.0" | 30.0" |
| 6' | 72.0" | 54.0" |
| 8' | 96.0" | 78.0" |

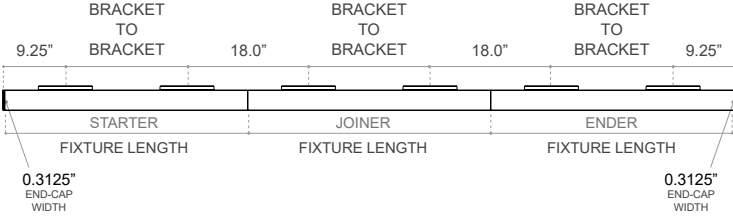

NOTE 1
2' fixtures use a single mounting bracket centered on the fixture

NOTE 2
10' & 12' fixtures have a third mounting bracket centered on the fixture