

LINEAR SERIES



DATE PROJECT

COMMENTS

CERTIFICATIONS



3S SUSPENDED DIRECT

AN EXTENSION OF OUR 3-INCH LINEAR FAMILY SERIES

FEATURES

OPTICAL SYSTEM

- 1. VERSATILE LIGHT ENGINE**
Multiple lumen intensities provide the correct level of illumination within each space.
- 2. EVENLY ILLUMINATED DIRECT LENS**
High efficiency diffuser designed to minimize glare and provide uniform light distribution.


HOUSING

- 3. ARCHITECTURAL DETAILS**
Provide a clean architectural appearance with the hidden connect mounting system and seamlessly adjoin luminaires with the sure-fit alignment process.
- 4. SURE-FIT ALIGNMENT**
4-Point alignment system adjoining each luminaire section to ensure straighter rows while minimizing the appearance of seams.


ELECTRICAL

- 5. OPTIONAL INTEGRAL EMERGENCY BATTERY PACK**
UL Listed 924 emergency system has been engineered to exceed UL minimum safety standards.
- 6. 0-10 VOLT DIMMING STANDARD**
120/277VAC 0-10V dimming to 1% standard.


LIGHT DISTRIBUTION: LAMBERTIAN




LIGHT DISTRIBUTION: WW



CROSS-SECTION: LAMBERTIAN



CROSS-SECTION: WW



ORDERING

SERIES	LENGTH	OUTPUT		CCT	VOLTAGE	MOUNTING		FINISH					
3S	XXX FT <small>2' Increments EX: 20' = 20</small>	VHD	1250 LM/FT	LD	500 LM/FT	30	3000K UNV	120-277V T1	1" T-Grid HC	Hard Ceiling	WH	White	
		HD	1000 LM/FT	VLD	250 LM/FT	35	3500K 347 ¹	347V T9	9/16" T-Grid	JB	Junction Box	BLK	Black
		MD	750 LM/FT	CD	Custom	40	4000K	SC	Screw Slot Grid			S	Silver
											GR	CHARCOAL Gray	

ORDERING NOTES
1 EM not available with 347V.
2 EM not available with 2' fixtures.

OPTIONS

CRI	SUSPENSION	INTEGRATED CONTROLS		OPTICAL					
BLANK = 80 CRI	BLANK = 48" CABLE	CB144	144" Cables	OS	Occupancy Sensor	BLANK = LAMBERTIAN			
C90	90 CRI	CB96	96" Cables	BC	Black Canopy & Cord	DOS	Daylight Occupancy Sensor	WW	Wall Wash

FOR INDIVIDUALS

EM² Emergency Battery

EC Emergency Circuit

FOR LINEAR RUNS^{3,4}

EM	QUANTITY PER RUN ³	POSITION IN RUN ⁴
EMERGENCY BATTERY PACK		
EC	QUANTITY PER RUN ³	POSITION IN RUN ⁴
EMERGENCY CIRCUIT		

EMERGENCY OPTION NOTES

3 EM and EC Quantity is not to exceed number of discrete fixture sections in a row.

4 EM and EC position refers to which fixture in the run that will be powered by the EM/EC circuit.
Position Options: S=Starter, J=Joiner, E=Enders
Ex: 3S-24-HD-35-UNV-T1-WH-EM2SJ



3S SUSPENDED

DIRECT




PHOTOMETRICS & ENERGY CHARTS

3S-04-HD-35-UNV-XX-X

Total Lumens: 4,130
 Ratio: 0% Up & 100% Down
 Wattage: 32.9
 Efficacy: 125.3 LM/W
 Fixture Length: Four Feet

Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	1192.7	28.9
0 - 40	1913.9	46.3
0 - 60	3270.4	79.2
0 - 90	4128.8	100.0
90 - 180	1.13	0.0
0 - 180	4129.9	100.0

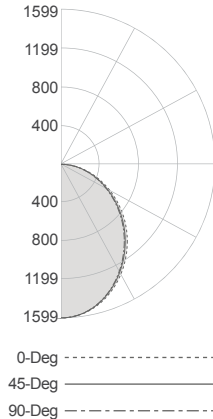


3S-04-HD-35-UNV-XX-X-WW

Total Lumens: 4,056
 Ratio: 0% Up & 100% Down
 Wattage: 32.9
 Efficacy: 123.1 LM/W
 Fixture Length: Four Feet

Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	1302.5	32.1
0 - 40	2069.1	51.0
0 - 60	3395.8	83.7
0 - 90	4055.8	100.0
90 - 180	0.23	0.0
0 - 180	4056.0	100.0

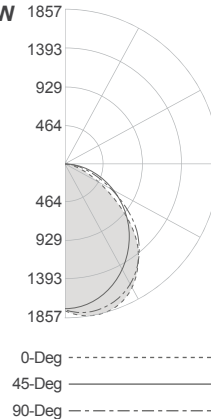

Direct (Lambertian) Light

	VHD:1250	HD:1000	MD:750	LD:500	VLD:250
Watts/ft	10.0	8.2	6.5	4.0	2.1
Lumens/ft	1210	1014	761	509	246
LPW	120.9	123.1	117.4	127.2	119.3

Direct (Wall Wash) Light

	VHD:1250	HD:1000	MD:750	LD:500	VLD:250
Watts/ft	10.0	8.2	6.5	4.0	2.1
Lumens/ft	1210	1014	761	509	246
LPW	120.9	123.1	117.4	127.2	119.3

SPECIFICATIONS

MECHANICAL

Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment and mounting attachment. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire.

Alignment/Assembly:

The alignment system employs a four-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment pins ensure the outer extruded aluminum rails are aligned, while a draw-screw secures housing-to-housing attachment. Additional alignment biscuits double as the light shields.

Lengths:

The 3S is available in a minimum 2-foot (nominal) length with additional 2-foot increments available. Longer fixture rows are available and will be configured per Lumato factory specifications; typical rows are configured with 4-foot, 6-foot and 8-foot fixtures. Max run length on one power feed is 72'. Continuous runs over 72' will require 2 power feeds.

Mounting Method/Hardware:

The 3S is available for mounting upon any ceiling type, additional mounting hardware available by others.

Exterior Finish:

The 3S is available in White and Black polyester powder coat finish to ensure durability.

Suspension Components:

Fixtures are suspended by 1/16" galvanized aircraft cable. Cables are attached to the ceiling suspension point with a 1/4-20 threaded ceiling cable barrel that incorporates a threaded ring to support the feed/hanger canopy allowing access to the j-box/hanger without removal of the suspension cable allowing conductor inspection/service without having to support the fixture(s). Feed canopies are 5" O.D. And hanger canopies are 2" O.D. Cable lengths can be specified for 48", 96" and 144" suspension lengths. Ceiling type options are "T1" T-grid, "T9" T-grid, "SC" screw slot grid, "HC" hard ceiling or "JB" hard ceiling J-box mount.

Integrated Controls:

The 3S is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section.

OPERATION

Light Engine:

The 3S is available in 3000K, 3500K and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 80+. Optional 90+ CRI available.

Optics:

The back lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated lower surface with minimal glare.

Wall Wash:

Asymmetric extruded aluminum reflector with recessed extruded acrylic lens to achieve a superior wall uniformity while minimizing glare.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

Dimming:

The 3S comes standard with 0-10V dimming down to 1%.

Emergency Battery Pack:

UL Listed 924 Emergency System has been engineered to exceed UL Minimum Safety Standards. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, 10' HD and VHD, and 12' MD, HD, and VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run with needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Five (5) Year limited warranty from date of shipment.

Lumen Maintenance:

Rated for 85% initial lumen output at 85,000 Hours of operation, operated at 25°C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

Certifications:

All Luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

Shipping:

2-Week lead time for orders up to 1000 Linear Feet.
 4-Week lead time for orders with a Black finish.
 Lead time for orders greater and 1,000' will be determined at time of order.

Manufactured in the USA:

All Luminaire and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.