

### HOUSING

- 1. MINIMAL RECESSED HEIGHT**  
Shallow 3.5" Housing Provides Maximum Plenum Clearance
- 2. ONE-PIECE EXTRUDED ALUMINUM HOUSING**  
One-Piece Extruded Aluminum Housing Ensures Straighter Rows and Consistent Lens Retention
- 3. MULTIPLE CEILING SYSTEMS**  
Engineered to be Installed within Multiple Ceiling Applications; See Options Below for Available Mounting Types


### OPTICAL SYSTEM

- 4. EVENLY ILLUMINATED ARCHITECTURAL LENS**  
Architectural Grade Diffuser is Utilized to Establish Optimal Aesthetic Value without Sacrificing High Efficiency Light Output.
- 5. VERSATILE LIGHT ENGINE**  
Multiple Lumen Intensities Provide the Correct Level of Illumination Within Each Space


### ELECTRICAL

- 6. OPTIONAL INTEGRAL EMERGENCY BATTERY PACK**  
UL Listed 924 Emergency System has been Engineered to Exceed UL Minimum Safety Standards.
- 7. 0-10 VOLT DIMMING STANDARD**  
See Options Below for Additional Dimming Options


LIGHT DISTRIBUTION: SD




CROSS-SECTION: SD



LIGHT DISTRIBUTION: WW



CROSS-SECTION: WW



SERIES	LENGTH <sup>1</sup>	OUTPUT <sup>2</sup>	RATIO <sup>3</sup>	VOLTAGE	CCT	MOUNTING	COLOR <sup>5</sup>	DIRECT OPTICS	DIMMING
<b>R3</b>			<b>01</b>						
	<b>XXX</b> FT 1" INCREMENTS EX: 4' = 004	<b>H2</b> 1200 LM/FT <b>H1</b> 1000 LM/FT <b>H</b> 800 LM/FT <b>M</b> 600 LM/FT <b>L</b> 400 LM/FT <b>C</b> <sup>6</sup> CUSTOM	<b>01</b> 0/100	<b>12</b> 120V <b>27</b> 277V	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>T1</b> 1" T GRID <b>T9</b> 9/16" T GRID <b>TG</b> 1" T-TEG GRID <b>TG9</b> 9/16" T-TEG GRID <b>SC</b> SCREW SLOT GRID	<b>OF</b> OVERLAP FLANGE <b>SF</b> SPACKLE FLANGE	<b>W</b> WHITE <b>SD</b> SYMMETRICAL DOWN LIGHT <b>WW</b> <sup>8</sup> WALL WASH	<b>0-10</b> 1% 0-10V DIMMING <b>DALI</b> DALI DIMMING <b>ND</b> NO DIMMING

### OPTIONS

<sup>1</sup> Nominal length; 2' Minimum Length

<sup>2</sup> Nominal lumens per foot

<sup>3</sup> Ratio defined as percentage of light illuminated upwards versus percentage of light illuminated downwards

<sup>4</sup> 80 CRI standard

<sup>5</sup> White standard; Consult factory for additional color options

<sup>6</sup> Contact factory for available configurations and additional lead times

<sup>7</sup> Standard EC Illuminates Entire 8' Fixture Section. For Custom Options Please Consult Factory

<sup>8</sup> Not available with EM/GTD/Sensors. Only available in 2' increments

**SS-A/B** SEPARATE SWITCHING LINEAR ZONES

**SC-A/B** SEPARATE CIRCUIT LINEAR ZONES

**EM** EMERGENCY BATTERY PACK

**EC**<sup>7</sup> EMERGENCY CIRCUIT

**NC** NIGHT LIGHT CIRCUIT

**GTD** GENERATOR TRANS. DEVICE

**DS** DAYLIGHT SENSOR

**OS** OCCUPANCY SENSOR

**DOS** DUAL DAYLIGHT & OCCUPANCY SENSOR

**FS** FUSING

**C90**<sup>90</sup> CRI



### MECHANICAL

#### Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment and mounting attachment.

#### Alignment/Assembly:

The Sure-Fit alignment system employs a four-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Two alignment tabs ensure the outer extruded aluminum rails are aligned, while two draw-screws secure housing-to-housing attachment.

#### Lengths:

The R3 is available in a minimum 2-foot (24") length with additional 1-foot (12") increments available. Longer fixture rows are available and will be configured per Lumato factory specifications; typical rows are configured with 8-foot fixtures.

#### Mounting Method/Hardware:

The R3 is designed for lay-in grid ceilings or "Hard" sheet rock construction. Hard ceiling installations can be supplied for overlapping flange or "Trimless" spackle flange types.

#### Exterior Finish:

The R3 is available in White polyester powder coat finish to ensure durability. Luminaires are available in any RAL color as an option.

### OPERATION

#### Light Engine:

The R3 is available in 3000K, 3500K & 4000K CCT all within a 2.5-Step MacAdam Ellipse and has a standard CRI of 80+ with a 90+ CRI option available.

#### Optics:

The back lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated lower surface with minimal glare.

#### Wall Wash Optics:

Asymmetric extruded aluminum reflector with recessed extruded acrylic lens to achieve a superior wall uniformity while minimizing glare.

#### Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

#### Dimming:

The R3 comes standard with 0-10V dimming and DALI dimming is available as an option. The 0-10V control allows dimming down to 1% while DALI also allows for dimming to 5%.

#### Optional Controls:

The R3 is available with optional integrated daylight and occupancy sensors. Sensors may extend the length of the luminaire and are located at the end of a row, near the power feed. Contact factory for custom locations.

### GENERAL

#### Warranty:

Five (5) year limited warranty from date of shipment, covers LED's, driver, and luminaire. Optional accessories are covered by their individual Manufacturers warranties.

#### Lumen Maintenance:

Rated for 85% initial lumen output (L85) at 50,000 Hours of operation, operated at 25C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).


#### Certification

All Luminaires are UL and cUL Listed, approved for Dry/Damp locations

#### Made in the USA

All Lumato Luminaires and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.


### MOUNTING OPTIONS

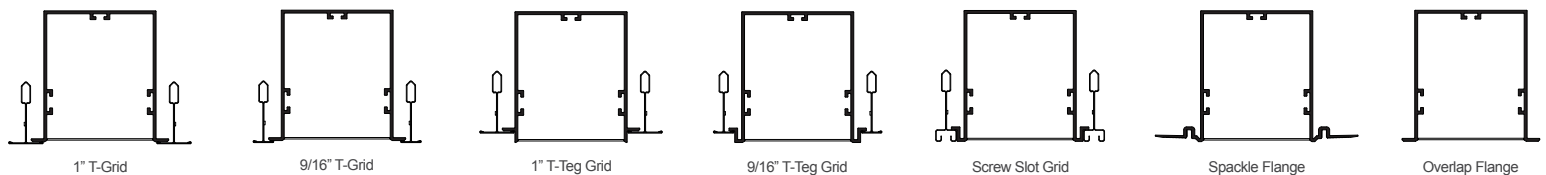

### PHOTOMETRICS

#### R3-4-M-01-12-30-XX-X-SD

Total Lumens: 2,321  
Ratio: 0% Up and 100% Down  
Wattage: 22.50  
Efficacy: 103.2 (Lumens Per Watt)  
Fixture Length: Four Feet

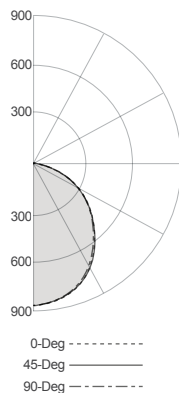


#### Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	666	28.7
0 - 40	1072	46.2
0 - 60	1842	79.4
0 - 90	2321	100.0
90 - 180	0	0.0
0 - 180	2321	100.0

#### R3-4-M-01-12-30-XX-X-WW

Total Lumens: 3,076.6  
Ratio: 0% Up and 100% Down  
Wattage: 25.90  
Efficacy: 118.79 (Lumens Per Watt)  
Fixture Length: Four Feet

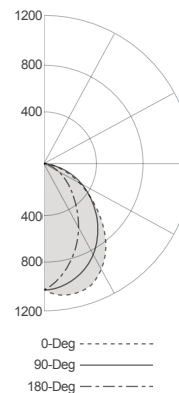

#### Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	971.6	31.6
0 - 40	1549.1	50.3
0 - 60	2566.6	83.4
0 - 90	3076.6	100.0
90 - 180	0.0	0.0
0 - 180	3076.6	100.0

### ENERGY CONSUMPTION

#### Watts Per Linear Foot

##### Symmetrical Down Light

	H2:1200	H1:1000	H:800	M:600	L:400
Watts/Ft.	12.53	9.575	7.83	5.63	4.03
Lumens/Ft.	1,229.00	957.25	786.75	580.25	399.75
Lumens/W	98.1	100.0	100.5	103.2	99.3

##### Wall Wash

	H2:1200	H1:1000	H:800	M:600	L:400
Watts/Ft.	11.68	10.95	9.45	6.48	4.55
Lumens/Ft.	1332.06	1257.15	1094.91	769.14	526.89
Lumens/W	114.09	114.81	115.86	118.79	115.80