


LINEAR


SERIES

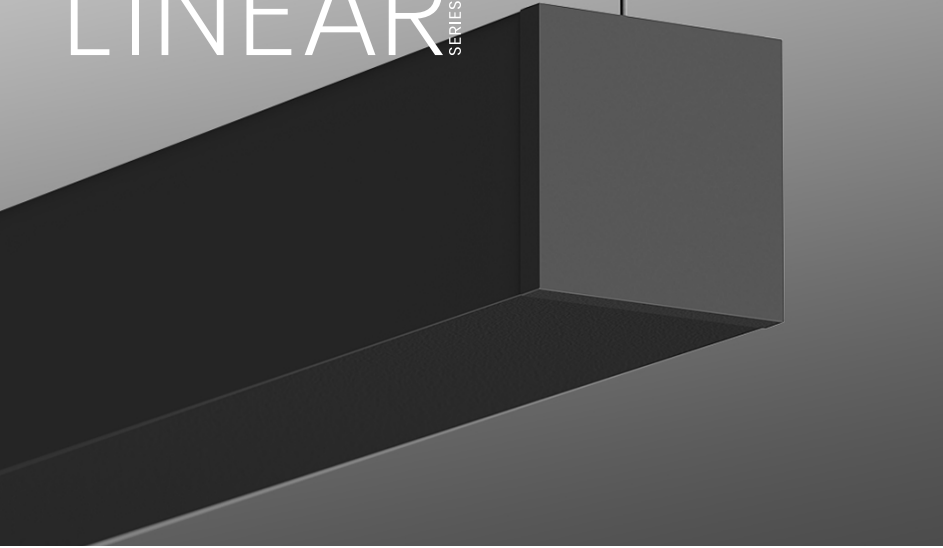

DATE PROJECT

COMMENTS

CERTIFICATIONS



SQ2 SUSPENDED INDIRECT

FEATURES

OPTICAL SYSTEM

1. OPTIMAL INDIRECT BATWING DISTRIBUTION

135 degree ultra-wide batwing distribution provides even illumination across a ceiling while allowing for maximum spacing between fixtures.

2. VERSATILE LIGHT ENGINE

Multiple lumen intensities provide the correct level of illumination within each space.

HOUSING

3. HIDDEN CONNECT

Recessed connection point between cable and fixture eliminates the visibility of hardware.

4. SURE-FIT ALIGNMENT

Full-body alignment system adjoins each luminaire section to ensure straighter rows while minimizing the appearance of seams.

ELECTRICAL


5. EFFICACY

Luminaire efficacy up to 146.9 lumens per watt helps achieve Best in Class power density performance.


DIMMING

6. 0-10 VOLT DIMMING TO 1% STANDARD

LIGHT DISTRIBUTION



CROSS-SECTION



SAMPLE PART NUMBER: SQ2-I-24-MU-30-UNV-T1-WH

ORDERING

| SERIES | LENGTH ¹ | UPPER OUTPUT | | CCT | VOLTAGE | MOUNTING | FINISH | ORDERING NOTES |
|--------|----------------------------------|-----------------------|----------------------|-----------------|-----------------------------|---------------------------|-------------------------|----------------|
| SQ2-I | | | | | | | | |
| | XX FT | VHU 1250 LM/FT | LU 500 LM/FT | 30 3000K | UNV 120-277V | T1 1" T-Grid | WH White | |
| | 2' Increments EX: 20' FT = 20 | HU 1000 LM/FT | VLU 250 LM/FT | 35 3500K | 347² 347V | T9 9/16" T-Grid | BLK Black | |
| | | MU 750 LM/FT | CU Custom | 40 4000K | | SC Screw Slot Grid | S Silver | |
| | | | | | | HC Hard Ceiling | GR CHARCOAL Gray | |
| | | | | | | JB Junction Box | | |

OPTIONS

| CRI | SUSPENSION ³ | INTEGRATED CONTROLS | FOR INDIVIDUALS | FOR LINEAR RUNS ^{5, 6} | | | |
|-------------------------------|-------------------------------|--|---|---------------------------------|------------------------|-------------------------------|------------------------------|
| BLANK = 80 CRI | BLANK = 48" CABLE | DOS Daylight Occupancy Sensor DALI DRIVER STANDARD | EM⁴ Emergency Battery | EM | EMERGENCY BATTERY PACK | QUANTITY PER RUN ⁵ | POSITION IN RUN ⁶ |
| C90⁷ 90 CRI | CB96 96" Cable | | EC Emergency Circuit | EC | EMERGENCY CIRCUIT | QUANTITY PER RUN ⁵ | POSITION IN RUN ⁶ |
| | CB144 144" Cables | | | | | | |
| | BC Black Canopy & Cord | | | | | | |

EMERGENCY OPTION NOTES

5 EM and EC Quantity is not to exceed number of discrete fixture sections in a row.

6 EM and EC position refers to which fixture in the run that will be powered by the EM/EC circuit. Position Options: S = Starter; J = Joiner; E = Ender
Ex: SQ2-I-24-MU-30-UNV-T1-WH-EM2SJ

7 Longer lead-times may apply for 90 CRI. Consult factory.



SQ2 SUSPENDED

INDIRECT




PHOTOMETRICS & ENERGY CHARTS

SQ2-I-04-HU-30

Total Lumens: 3,990
 Ratio: 100% Up & 0% Down
 Wattage: 28.4
 Efficacy: 140 LM/W
 Fixture Length: Four Feet

Zonal Lumen Summary

| Zone | %Fixt | % Fixt |
|----------|--------|--------|
| 0 - 90 | 2.7 | 0.1 |
| 90 - 120 | 1274.1 | 31.9 |
| 90 - 130 | 1974.5 | 49.5 |
| 90 - 150 | 3194.7 | 80.1 |
| 90 - 180 | 3987.6 | 99.9 |
| 0 - 180 | 3990.3 | 100.0 |
| 90 - 150 | 1601.3 | 40.0 |
| 90 - 180 | 2000.0 | 50.0 |
| 0 - 180 | 3999.9 | 100.0 |

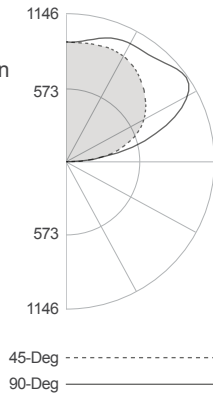

SPECIFICATIONS

MECHANICAL

Housing Construction:

Extruded aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment, and mounting attachment.

Alignment/Assembly:

The Sure-Fit alignment system employs a full height joining biscuit, designed to create straighter rows and eliminate light leak at fixture seams. Two nuts are used to draw fixtures together to secure housing-to-housing attachment.

Lengths:

The SQ2 is available in individual 2-foot (25.25"), 4-foot (48"), 6-foot (72"), 8-foot (96"), 10-foot (120"), and 12-foot (144") lengths (± 0.030 "). Longer fixture rows are available and will be configured per Lumato factory specifications; typical rows are configured with 8-foot fixtures. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire. Each end cap adds 5/16" to the length of each fixture run.

Mounting Method/Hardware:

The Hidden-Connect design recesses all attachment hardware (hanging cable and power cord) below the top plane of the housing to enable a sleek, clean finished look. Standard hanging hardware includes 1/16" diameter, galvanized steel aircraft cable with adjustable and lockable nickel-plated cable grippers and a white 18/5 S.J.T. power cord. The standard hardware includes a 60" power cord and 54" aircraft cables to accommodate a 48" mounting distance from the ceiling. Longer hanging cables and power cords are available as an option. Ceiling canopy provided. All Lumato suspension hardware is tested and listed to UL1598 requirements for loading/fixture support.

Suspension Components:

Fixtures are suspended by 1/16" galvanized aircraft cable. Cables are attached to the ceiling suspension point with a 1/4"-20 threaded ceiling cable barrel that incorporates a threaded ring to support the feed/hanger canopy allowing access to the J-box/hanger without removal of the suspension cable allowing conductor inspection/service without having to support the fixture(s). Feed canopies are 5" O.D. and hanger canopies are 2" O.D. Cable lengths can be specified for 48", 96" and 144" suspension lengths. Ceiling type options are "T1" = T-Grid, "T9" = T-Grid, "SC" = Screw Slot Grid, "HC" = Hard Ceiling or "JB" = J-Box mount.

Fixture Finish:

The SQ2 fixture finish is available in White, Black, Sliver or Charcoal Gray polyester powder coat finish to ensure durability. Luminaires are available in any RAL color as an option.

Integrated Controls:

The SQ2 is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section.

OPERATION

Light Engine:

The SQ2 is available in 3000K, 3500K, and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 80+ with a 90+ CRI option available. Longer lead-times may apply for 90 CRI. Consult factory.

Upper Optics:

The upper optics consist of an extruded acrylic lens that provides an ultra-wide batwing distribution to produce a more evenly illuminated ceiling and wider spacing of luminaires.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input or 347V. Power factor >0.9 THD<15%. Integral Surge Protection to 2KV.

Dimming:

The SQ2 comes standard with 0-10V dimming to 1%.

Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHU, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run with needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Ten (10) year limited warranty from date of shipment, covers LED's, driver and luminaire. Optional accessories are covered by their individual Manufacturers' warranties.

Lumen Maintenance:

Rated for 85% initial lumen output (L85) at 50,000 hours of operation, operated at 25°C ambient temperatures; per TM-21 Guidelines published by the Illuminated Engineering Society (IES).

Certification:

All luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

Manufactured in the USA:


All Lumato luminaires and components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA. All luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

SQ2 SUSPENDED INDIRECT




FIXTURE ROW LAYOUT: SINGLE UNIT 2' - 4' - 6' - 8' - 10' - 12'


2' FIXTURE

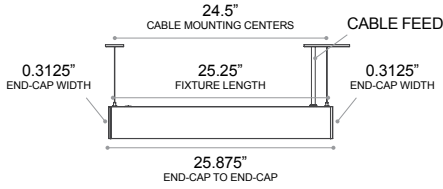


4' FIXTURE

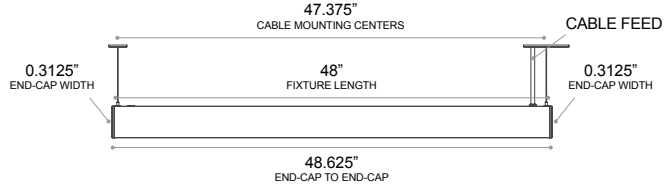


6' FIXTURE

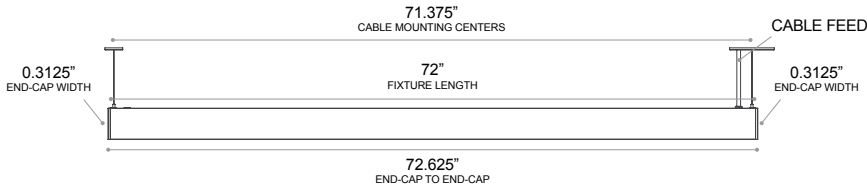


8' FIXTURE

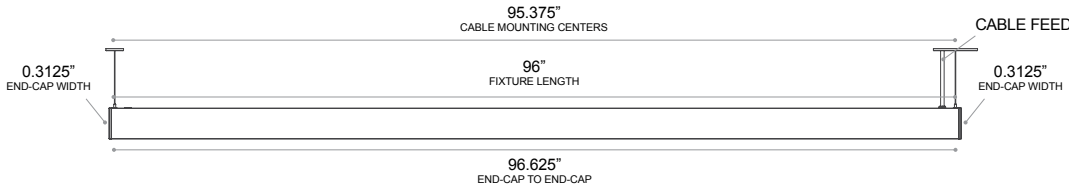

10' FIXTURE

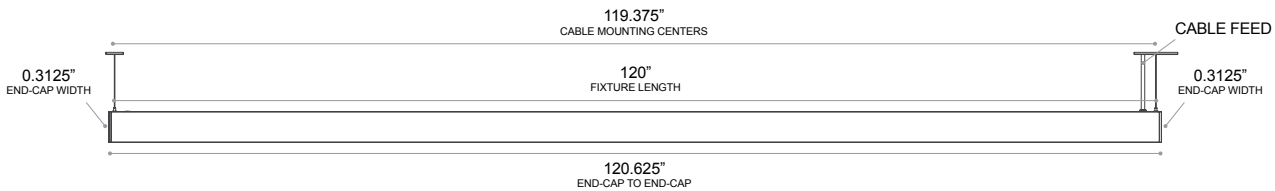

12' FIXTURE

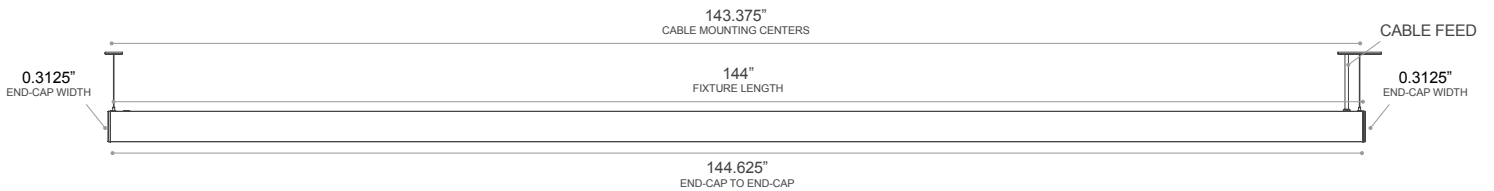

SQ2 SUSPENDED INDIRECT



FIXTURE ROW COMPONENTS

| RUN LENGTH (FT) | FIXTURE LENGTHS | | | | | | | | | JOINER KITS | FEED KITS | HANGER KITS | END-CAP TO END-CAP | |
|-----------------|-----------------|--------|----|----|----|----|----|----|----|-------------|-----------|-------------|--------------------|-------|
| | STARTER | JOINER | | | | | | | | | | | | ENDER |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | | |
| 14 | 6' | - | - | - | - | - | - | - | 8' | 1 | 1 | 2 | 168.625" | |
| 16 | 8' | - | - | - | - | - | - | - | 8' | 1 | 1 | 2 | 192.625" | |
| 18 | 4' | 6' | - | - | - | - | - | - | 8' | 2 | 1 | 3 | 216.625" | |
| 20 | 4' | 8' | - | - | - | - | - | - | 8' | 2 | 1 | 3 | 240.625" | |
| 22 | 6' | 8' | - | - | - | - | - | - | 8' | 2 | 1 | 3 | 264.625" | |
| 24 | 8' | 8' | - | - | - | - | - | - | 8' | 2 | 1 | 3 | 288.625" | |
| 26 | 4' | 6' | 8' | - | - | - | - | - | 8' | 3 | 1 | 4 | 312.625" | |
| 28 | 4' | 8' | 8' | - | - | - | - | - | 8' | 3 | 1 | 4 | 336.625" | |
| 30 | 6' | 8' | 8' | - | - | - | - | - | 8' | 3 | 1 | 4 | 360.625" | |
| 32 | 8' | 8' | 8' | - | - | - | - | - | 8' | 3 | 1 | 4 | 384.625" | |
| 34 | 4' | 6' | 8' | 8' | - | - | - | - | 8' | 4 | 1 | 5 | 408.625" | |
| 36 | 4' | 8' | 8' | 8' | - | - | - | - | 8' | 4 | 1 | 5 | 432.625" | |
| 38 | 6' | 8' | 8' | 8' | - | - | - | - | 8' | 4 | 1 | 5 | 456.625" | |
| 40 | 8' | 8' | 8' | 8' | - | - | - | - | 8' | 4 | 1 | 5 | 480.625" | |
| 42 | 4' | 6' | 8' | 8' | 8' | - | - | - | 8' | 5 | 1 | 6 | 504.625" | |
| 44 | 4' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 | 1 | 6 | 528.625" | |
| 46 | 6' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 | 1 | 6 | 552.625" | |
| 48 | 8' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 | 1 | 6 | 576.625" | |
| 50 | 4' | 6' | 8' | 8' | 8' | 8' | - | - | 8' | 6 | 1 | 7 | 600.625" | |
| 52 | 4' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 | 1 | 7 | 624.625" | |
| 54 | 6' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 | 1 | 7 | 648.625" | |
| 56 | 8' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 | 1 | 7 | 672.625" | |
| 58 | 4' | 6' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 | 1 | 8 | 696.625" | |
| 60 | 4' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 | 1 | 8 | 720.625" | |
| 62 | 6' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 | 1 | 8 | 744.625" | |
| 64 | 8' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 | 1 | 8 | 768.625" | |
| 66 | 4' | 6' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 | 1 | 9 | 792.625" | |
| 68 | 4' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 | 1 | 9 | 816.625" | |
| 70 | 6' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 | 1 | 9 | 840.625" | |
| 72 | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 | 1 | 9 | 864.625" | |

| | FIXTURE LENGTH | MOUNTING CENTERS | |
|----|----------------|------------------|----------------|
| | STARTER | STARTER | JOINER / ENDER |
| 4' | 48.0" | 47.375" | - |
| 6' | 72.0" | 71.375" | 72.0" |
| 8' | 96.0" | 95.375" | 96.0" |

