

OPTICAL SYSTEM

1. VERSATILE LIGHT ENGINE

Multiple Lumen Intensities Provide the Correct Level of Illumination Within Each Space

2. EVENLY ILLUMINATED LOWER LENS

High Efficiency Diffuser Designed to Minimize Glare and Provide Uniform Light Distribution

ADA COMPLIANT HOUSING

3. HIDDEN CONNECT

Concealed Connection Point Between the Wall and Fixture Eliminates the Visibility of Hardware

4. SURE-FIT ALIGNMENT

4-Point Alignment System Adjoining Each Luminaire Section to Ensure Straighter Rows While Minimizing the Appearance of Seams

ELECTRICAL

5. OPTIONAL INTEGRAL EMERGENCY BATTERY PACK

UL Listed 924 Emergency System has been Engineered to Exceed UL Minimum Safety Standards.


6. 0-10 VOLT DIMMING TO 1% STANDARD

See Options Below for Additional Dimming Options

LIGHT DISTRIBUTION



CROSS-SECTION

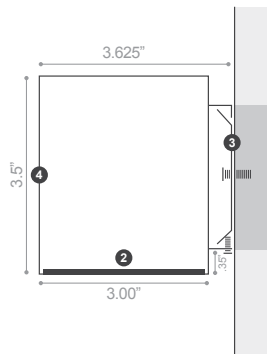

SERIES	LENGTH ¹	OUTPUT ²	RATIO ³	VOLTAGE	CCT	MOUNTING	COLOR	DIRECT OPTICS	DIMMING
W3			01			WM		SD	
	XXX FT 1" INCREMENTS EX: 4' = 004	H2 1200 LM/FT H1 1000 LM/FT H 800 LM/FT M 600 LM/FT L 400 LM/FT C ⁵ Custom	01 0/100	12 120V 27 277V	30 3000K 35 3500K 40 4000K	WM WALL MOUNT	W WHITE S SILVER G CHARCOAL GREY B BLACK	SD SYMMETRICAL DOWN LIGHT	0-10 1% 0-10V DIMMING DALI DALI DIMMING ND NO DIMMING

OPTIONS

EM EMERGENCY BATTERY PACK	DS DAYLIGHT SENSOR	FS FUSING
EC ⁶ EMERGENCY CIRCUIT	OS OCCUPANCY SENSOR	C90 ⁴ 90 CRI
NC NIGHT LIGHT CIRCUIT	DOS DUAL DAYLIGHT & OCCUPANCY SENSOR	
GTD GENERATOR TRANS. DEVICE		
SS-A/B SEPARATE SWITCHING LINEAR ZONES		
SC-A/B SEPARATE CIRCUIT LINEAR ZONES		

¹Nominal length; 2' Minimum Length

²Nominal lumens per foot

³Ratio defined as percentage of light illuminated upwards versus percentage of light illuminated downwards

⁴80 CRI standard

⁵Contact factory for available configurations and additional lead times

⁶Standard EC Illuminates Entire 8' Fixture Section. For Custom Options Please Consult Factory



MECHANICAL

Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment and mounting attachment.

Alignment/Assembly:

The Sure-Fit alignment system employs a six-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment tabs ensure the outer extruded aluminum rails are aligned, while two draw-screws secure housing-to-housing attachment.

Lengths:

The W3 is available in a minimum 2-foot (24") length with additional 2-foot (24") increments available. Longer fixture rows are available and will be configured per Lumato factory specifications; typical rows are configured with 8-foot fixtures.

Mounting Method/Hardware:

The Hidden-Connect design recesses or hides all attachment hardware. Standard mounting hardware includes a galvanized wall cleat with side to side adjusting for final alignment. Position all Junction Boxes in Accordance with Final Manufacturer Submittal Drawings. Feed Point is on the Left Hand Mounting Point for all Products Longer than 2'; All 2' Products have a Center Feed Point.

Exterior Finish:

The W3 is available in White, Black, Silver, or Charcoal Grey polyester powder coat finish to ensure durability. Luminaires are available in any RAL color as an option.

OPERATION

Light Engine:

The W3 is available in 3000K, 3500K & 4000K CCT all within a 2.5-Step MacAdam Ellipse and has a standard CRI of 80+ with a 90+ CRI option available.

Optics:

The back lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated lower surface with minimal glare.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

Dimming:

The W3 comes standard with 0-10V dimming. The 0-10V control allows dimming down to 1%. DALI dimming is available as an option and allows for dimming down to 5%.

Optional Controls:

The W3 is available with optional integrated daylight and occupancy sensors. Sensors extend the length of the luminaire and are located at the end of a row, near the power cord. Contact factory for custom locations.

GENERAL

Warranty:

Five (5) year limited warranty from date of shipment, covers LED's, driver, and luminaire. Optional accessories are covered by their individual Manufacturers warranties.

Lumen Maintenance:

Rated for 85% initial lumen output (L85) at 50,000 Hours of operation, operated at 25C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

Certification

All Luminaires are UL and cUL Listed, approved for Dry/Damp locations

Angled Connectors

Angled luminaire connectors are available, consult factory for drawings and specifications


Made in the USA

All Lumato Luminaires and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA

PHOTOMETRICS

W3-4-M-01-12-30-SM-X

Total Lumens: 2,321
Ratio: 0% Up and 100% Down
Wattage: 22.50
Efficacy: 103.2 (Lumens Per Watt)
Fixture Length: Four Feet

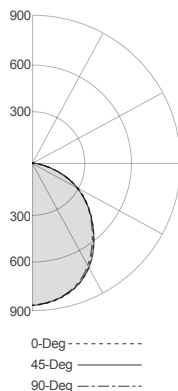

Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	666	28.7
0 - 40	1072	46.2
0 - 60	1842	79.4
0 - 90	2321	100.0
90 - 180	0	0.0
0 - 180	2321	100.0

Coefficients Of Utilization

RC	80				70				50			
	RW	70	50	30	10	70	50	30	10	50	30	10
0	119	119	119	119	119	116	116	116	116	111	111	111
1	109	104	100	96	96	106	102	98	94	97	94	91
2	99	91	84	78	78	96	89	83	77	85	80	76
3	90	80	72	65	65	88	78	71	65	75	69	63
4	83	71	62	55	55	80	70	61	55	67	60	54
5	76	63	54	48	48	74	62	54	48	60	53	47
6	70	57	48	42	42	69	56	48	42	54	47	41
7	65	52	43	37	37	64	51	43	37	50	42	37
8	61	47	39	33	33	59	47	39	33	45	38	33
9	57	44	35	30	30	56	43	35	30	42	35	30
10	53	40	32	27	27	52	40	32	27	39	32	27

ENERGY CONSUMPTION

Watts Per Linear Foot

	H2:1200	H1:1000	H:800	M:600	L:400
0/100	12.53	9.575	7.83	5.63	4.03